

7" 1000 NITS HIGH BRIGHTNESS INDUSTRIAL-GRADE TOUCH MONITOR



1000 Nits



1280x800



10-Point Touch



Auto Dimming



HDMI / VGA
USB-C



ISO7637-2



LED PANEL LIFE TIME

A selection of high quality industrial LCD with a longer life time.




OPTIONAL IP65 FRAME

Features with HDMI extension cable and IP65 rating housing.



Model: **719/C** | **719/T**
Without touch | With touch

1000 NITS

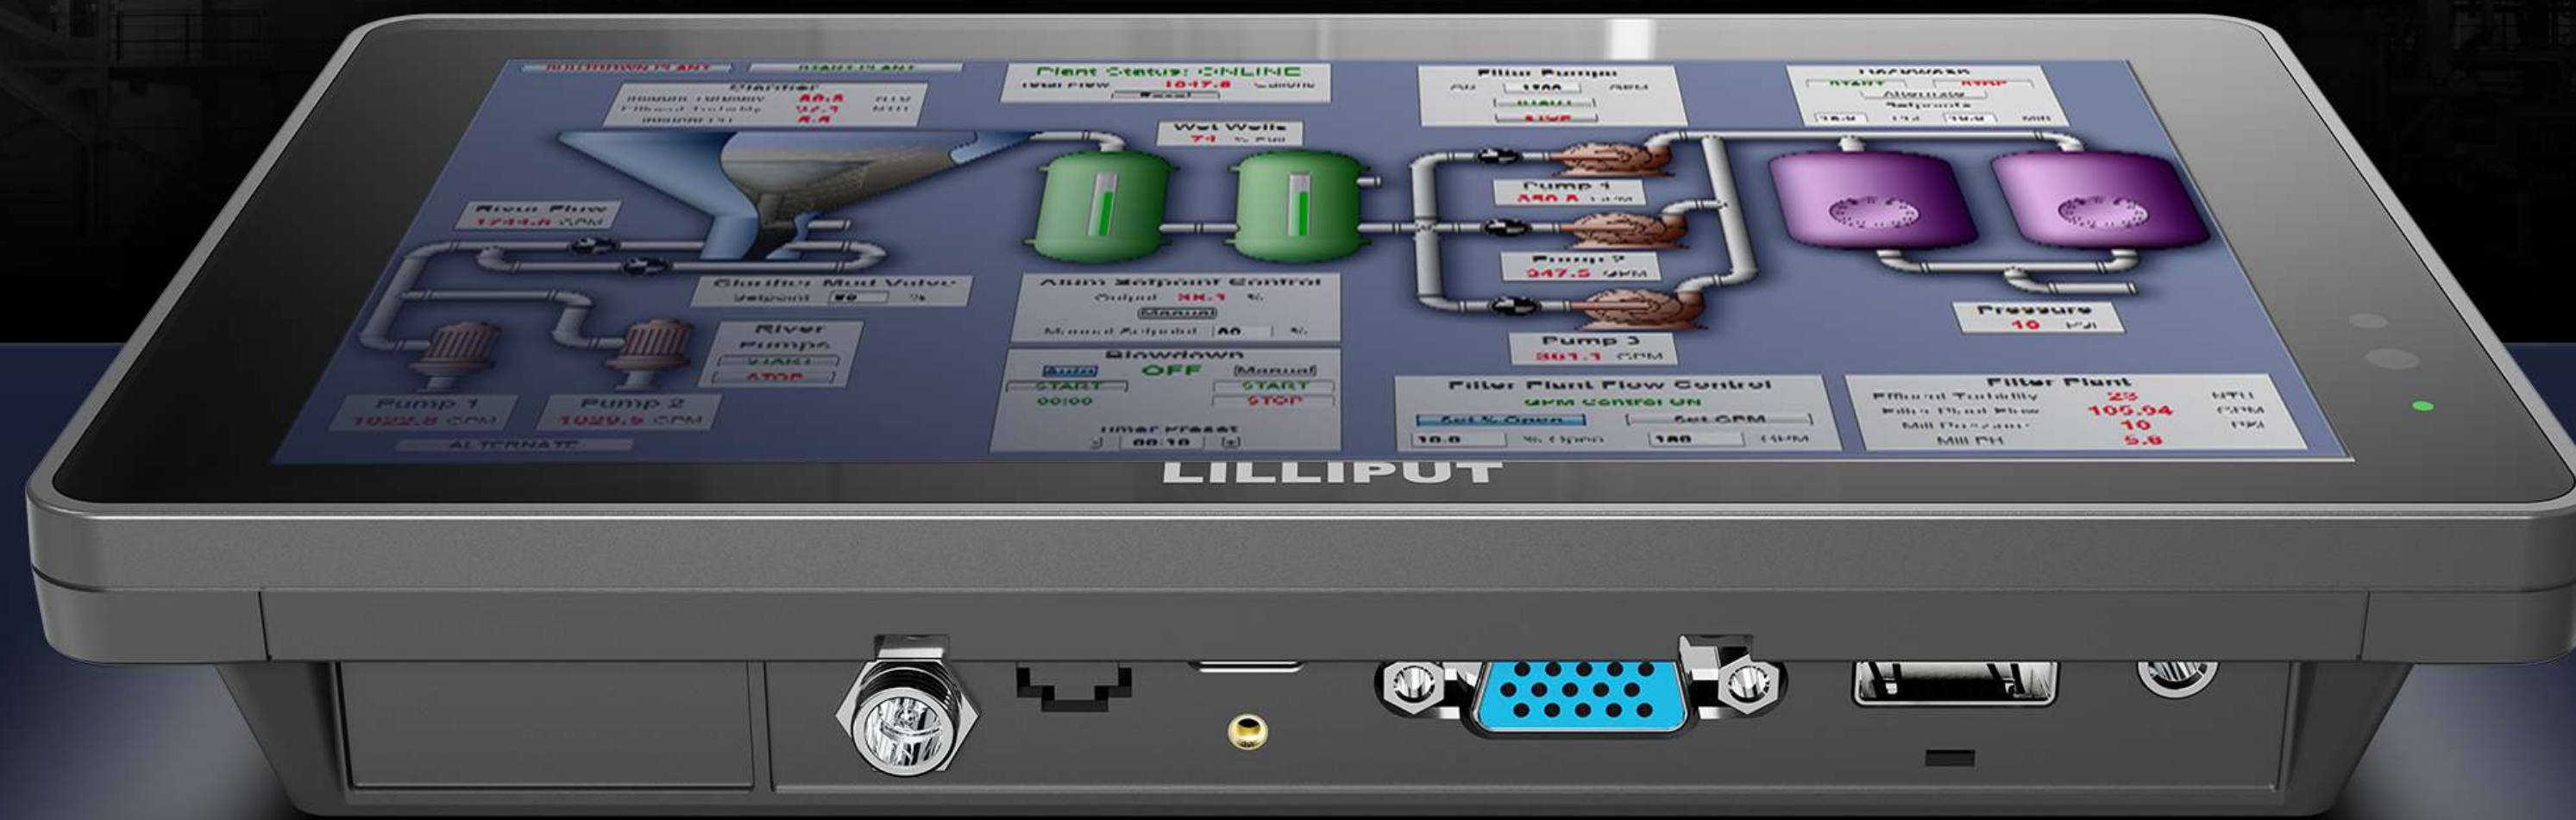

Touch monitor features with 1000 nits high brightness for outdoor sunlight readable.



7 INCH

7" Industrial-grade touch screen panel with 1280x800 resolution.



1000 NITS

The screen can still be seen clearly in outdoor use without hindering operation.



AUTO DIMMING

Depending on the intensity of ambient light, the brightness of screen will be automatically adjusted to save power.


50000 Hours
LED PANEL LIFE TIME

Hardware engineers selected high quality industrial-grade LCD screen through multiple tests, giving the monitors an exceptional working life.



HIGH SENSITIVITY

The touch screen supports user to operate with wet hands or a wide range of gloves, such as rubber gloves, latex gloves and PVC gloves.

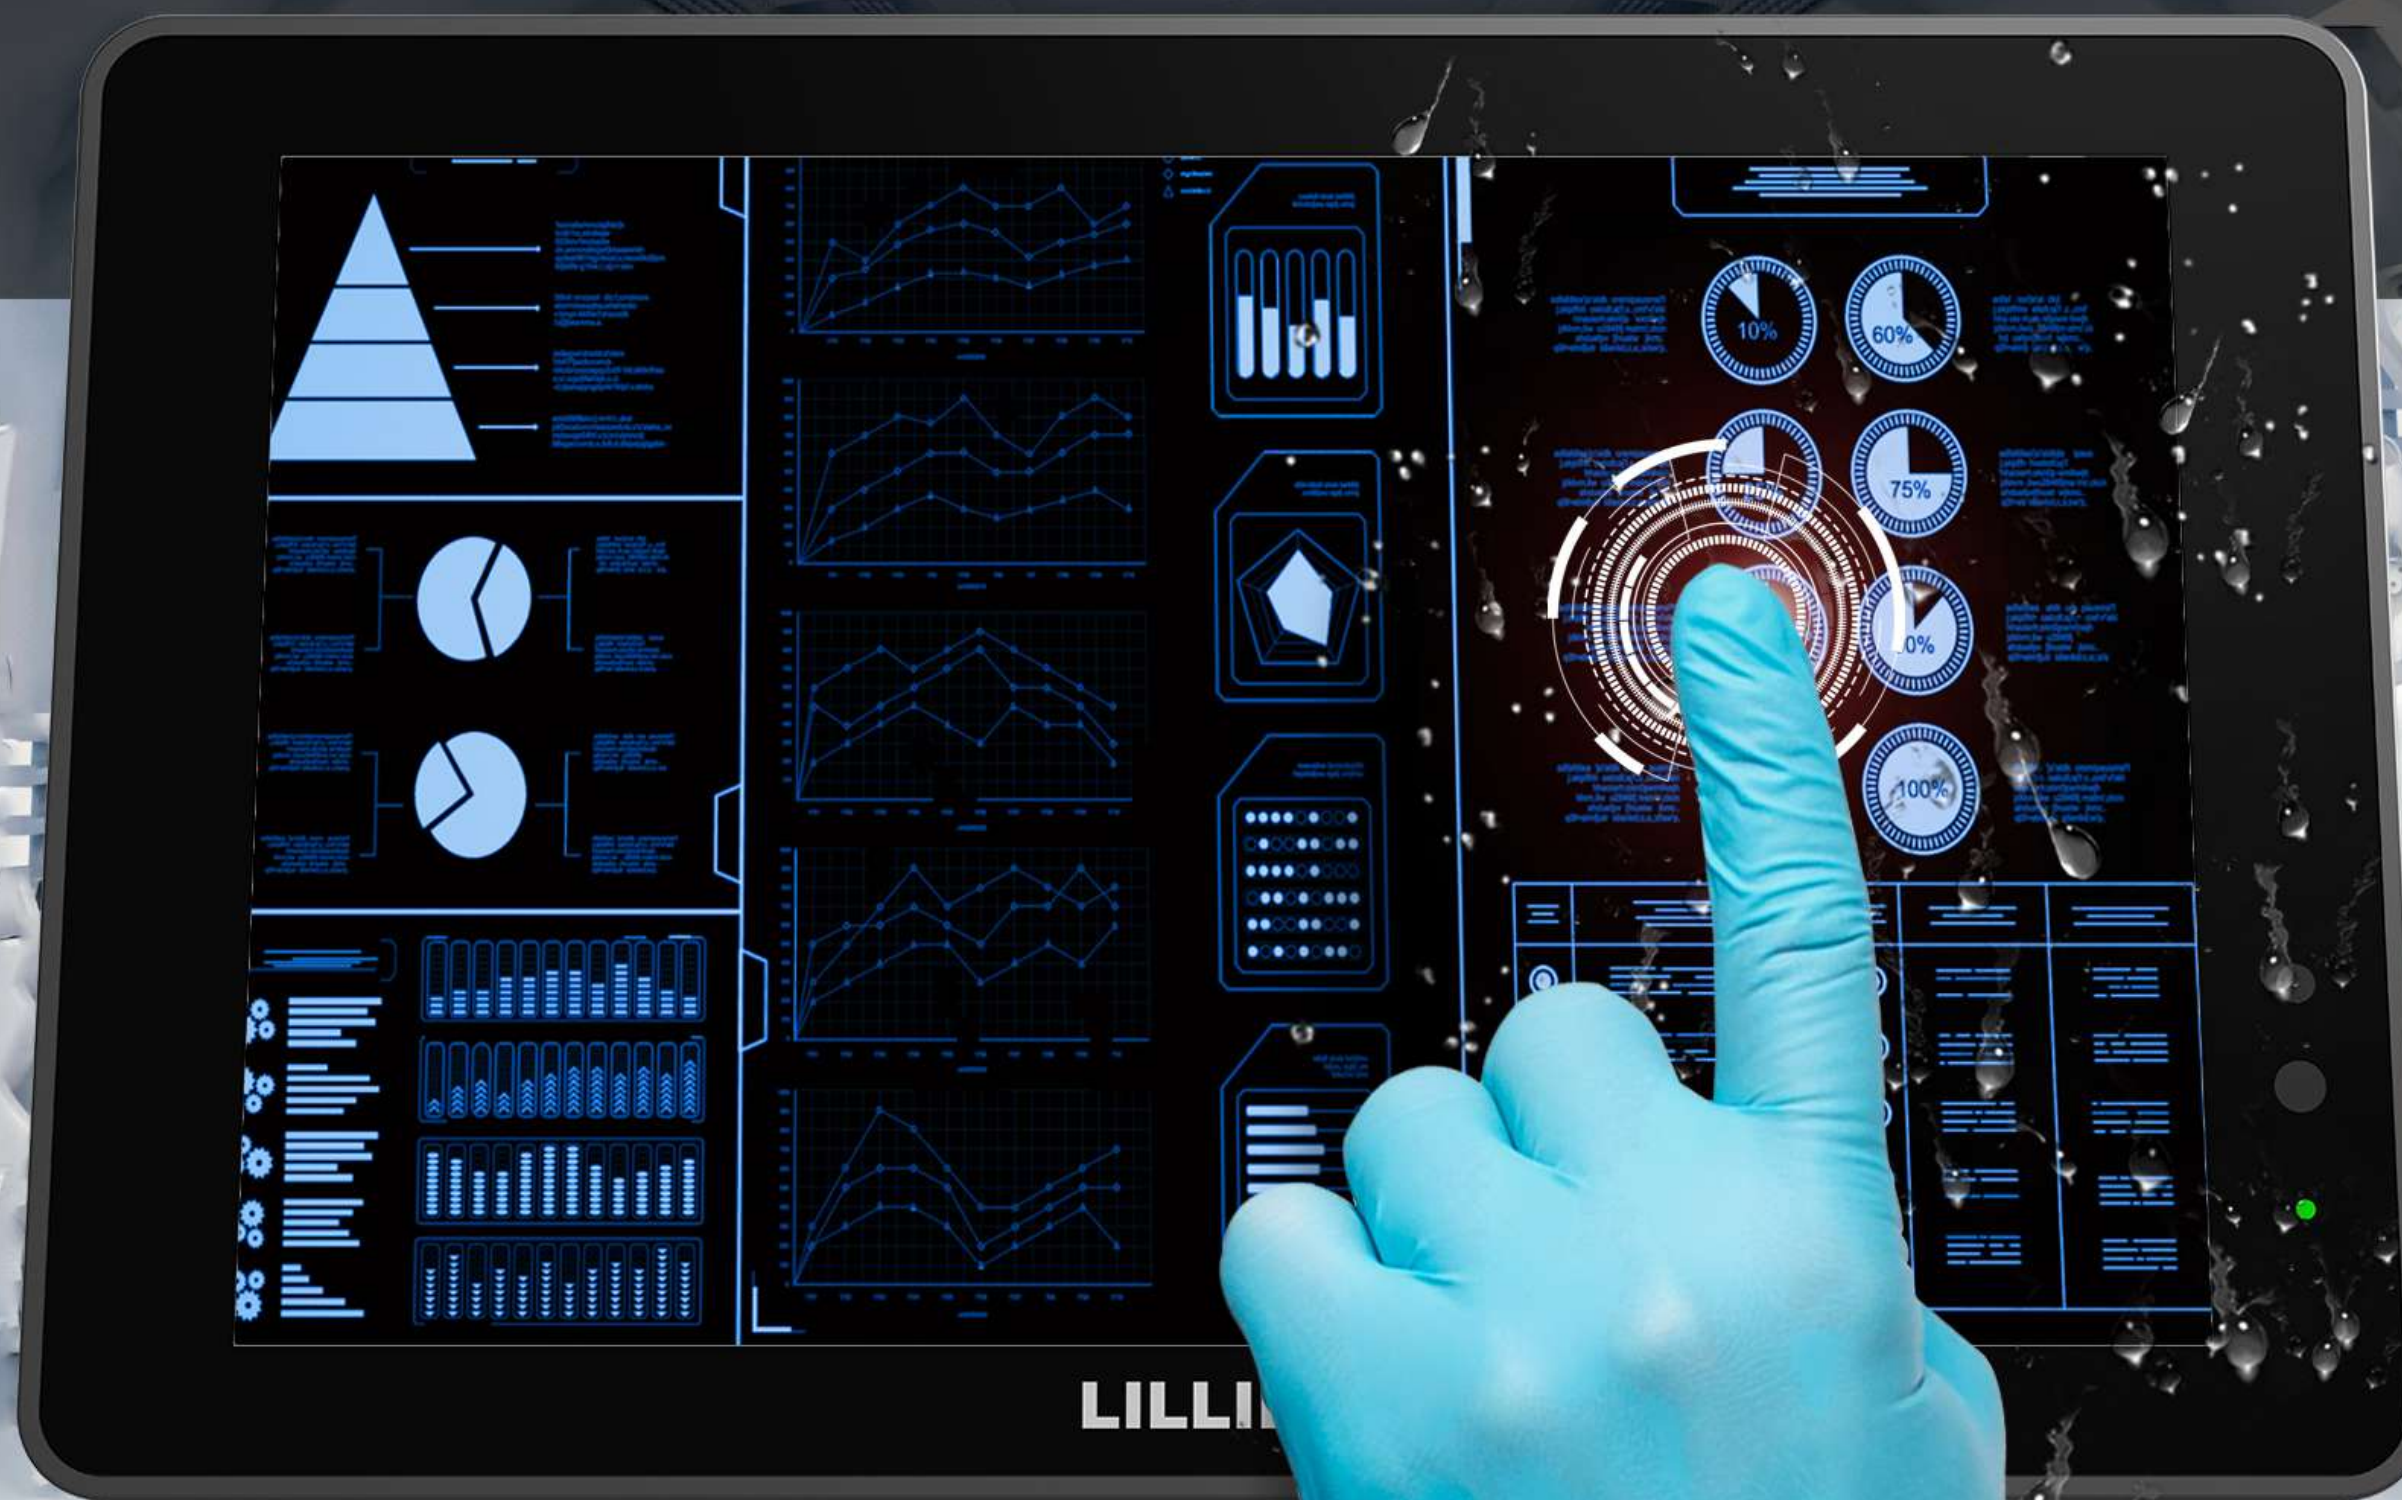

IP65 RATING

FOR OPTIONAL IP65 FRAME

Monitor is designed to carry IP65 rating of protection which offer complete protection against particles, and a good level of protection against water projected by a nozzle against monitor from any direction.



HDMI / VGA / USB-C

RICH INTERFACES

The monitor has a larger number of interfaces, including an USB Type-C interface that can transmit both video signals and touch functions, making wiring easier.



ANTI-DROP
USB Type-C cable with anti-drop design.

DC POWER IN
9V-36V Input.

USB TYPE-C
For touch function, video signal from PC, or power.
**Tip: The PC must support PD protocol for video signal

VGA IN
Support up to 1080p 60Hz.



HDMI IN
HDMI interface with anti-drop design.

EARPHONE JACK
3.5mm, audio output.

OPTIONAL IP65 FRAME

WITH HDMI EXTENSION CABLE

Rugged extension cable designed for body waterproofing & dustproofing, with HDMI, USB and DC ports.



USB IN
For Touch.

HDMI IN
Support up to 4K 30Hz.

DC POWER IN
9V-36V Input.



INDUSTRIAL CONTROL



DASHBOARD INTERFACE



VEHICLE DISPLAY



VESA 75MM BRACKET

Quality folding VESA 75mm bracket that can be placed on a table or fixed to ceiling.

SPECIFICATIONS

MODEL NO.:		719/C	719/T	719/C	719/T
STRUCTURE		Standard		With Optional IP65 Frame	
		-	10-point PCAP	-	10-point PCAP
DISPLAY	Touch Screen	-	10-point PCAP	-	10-point PCAP
	Panel	7" LCD			
	Physical Resolution	1280×800			
	Aspect Ratio	16:10			
	Brightness	1000 nits			
	Contrast	800:1			
	Viewing Angle	170°/ 170°(H/V)			
	LED Panel Life Time	50000h			
INPUT	HDMI	1		1	
	VGA	1		-	
	USB	USB Type-C (For touch + video signal)		USB Type-A (For touch only)	
SUPPORTED FORMATS	HDMI	2160p 24/25/30, 1080p 24/25/30/50/60, 1080i 50/60, 720p 50/60...			
	VGA	1080p 24/25/30/50/60, 1080pSF 24/25/30, 1080i 50/60, 720p 50/60...			
	USB Type-C	2160p 24/25/30/50/60, 1080p 24/25/30/50/60, 1080i 50/60, 720p 50/60...			
AUDIO IN/OUT	Speaker	1			
	HDMI	Available			
	Ear Jack	3.5mm - 2ch 48kHz 24-bit			
POWER	Input Voltage	DC 9-36V			
	Power Consumption	≤8.5W (12V)			
ENVIRONMENT	Operating Temperature	-20°C~60°C			
	Storage Temperature	-30°C~80°C			
	IP Rating	-		IP65	
DIMENSION	Weight	410g		560g	
	Dimension(LWD)	184.5mm × 118.8mm × 32mm			



Standard



Optional IP65 Frame

ACCESSORIES

STANDARD



12V 2A Power Adapter



HDMI A-A Cable



USB-A - C Cable (For Touch)



USB-C - C Cable (With Screw)

OPTIONAL IP65 FRAME



12V 2A Power Adapter



HDMI A-A Cable
(HDMI Ver.)



USB-A - A Cable (For Touch)

OPTIONAL



Remote Control



VESA 75mm Bracket



HDMI Cable Lock

