

5.4" 1920×1200 Full HD monitor with silicone case

# 5.4" HDMI 2.0 & 3G-SDI **On-Camera Monitor**

DC 12V EAR

On-Camera monitor for professional camcorder & DSLR Application for taking photos & making movies.












### **Excellent Display**

The 5.4" 16:10 LTPS panel with 1920x1200 full HD resolution, 1100:1 high contrast, 160° wide viewing angles, 600cd/m² high brightness, 88% DCI-P3 color space, which offers outstanding viewing experience.

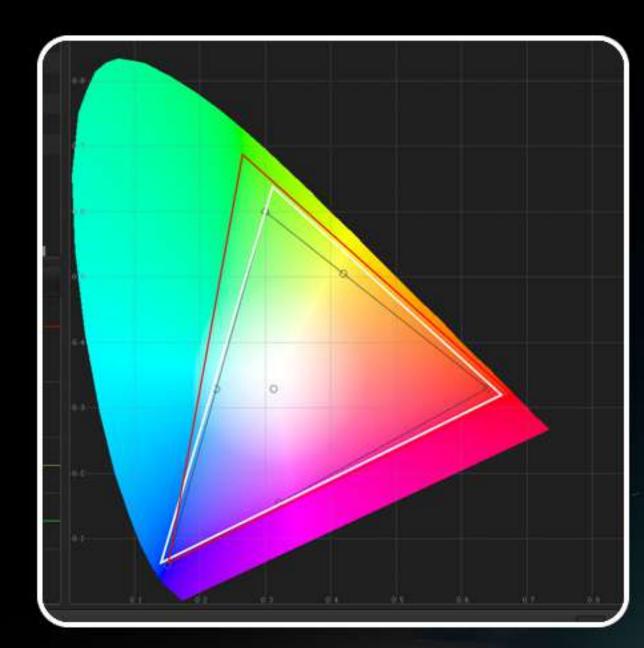

### **Color Space**

Color space affects the richness of picture's color, the better color space, the better color reproduction.





When HDR is activated, the display reproduces a greater dynamic of luminosity, allowing lighter and darker details to be displayed more clearly. Effectively enhancing the overall picture quality. Support ST 2084 300 / 1000 / 10000 and HLG.



HDR OFF

HDR ON

## 3D-LUT

3D-LUT is a table for quickly looking up and output specific color data. By loading different 3D-LUT tables, it can quickly recombine color tone to form different color styles. Built-in 3D-LUT, featuring 17 default logs and 6 user logs.




#### 

-----


Concernant of the second

SDI supports up to 1920×1080 60p/50p/30p/25p/24p(3G-SDI signal), and downward compatible with HD-SDI and SD-SDI.

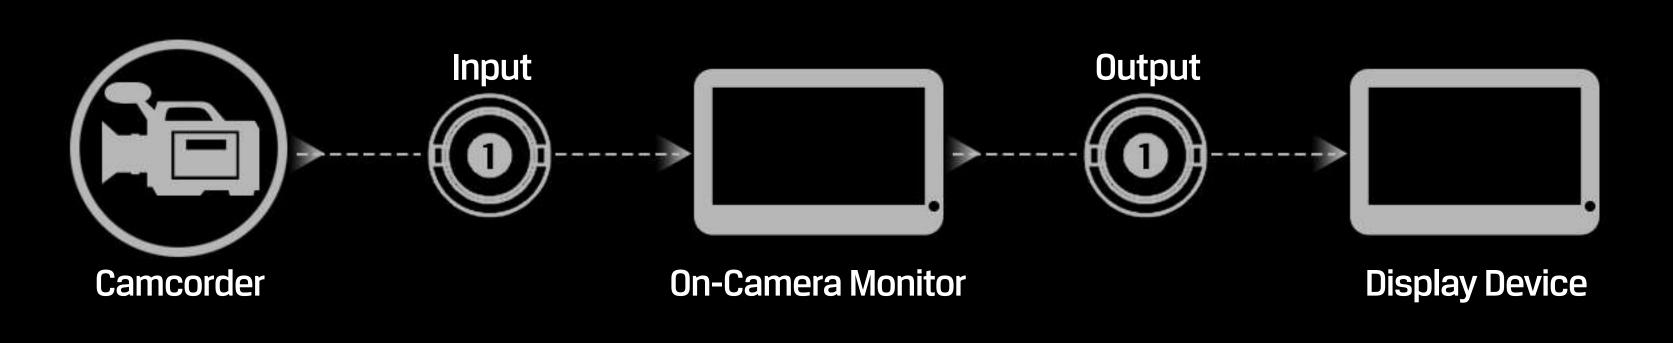

3G-SDI signal can loop output to the other monitor or device when 3G-SDI signal input to this model.




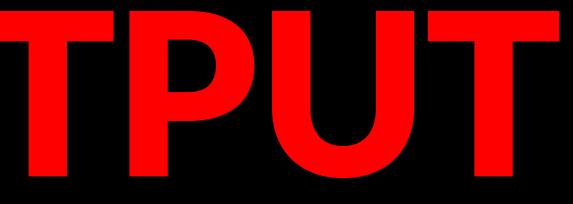



#### 

30p/25p/24p.

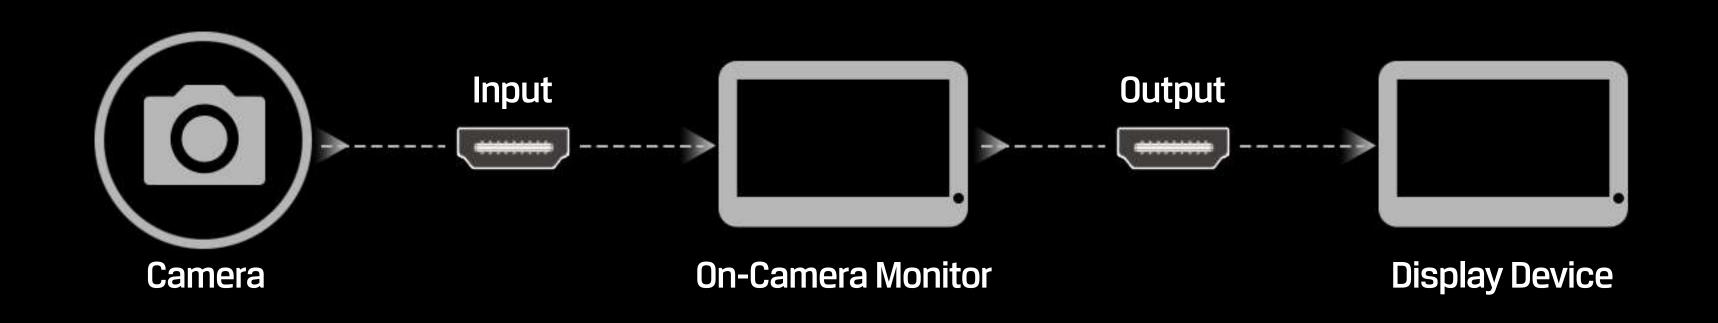

Some commercially DSLR Cameras (GH-5, R5...) have been upgraded to HDMI 4K 60Hz video output. It means this monitor is compatible with the best output video formats of DSLR cameras on the market.




HDMI 2.0 supports up to 4096×2160 60p/50p/30p/25p/24p and 3840×2160 60p/50p/



# **Camera Auxiliary Functions**

Provides plenty of auxiliary functions for taking photos and making movies, such as peaking, false color and audio level meter.









-48









Pixel zoom Vector scope











00:00:00 Time code



























































































































FULL SCREEN WAVEFORM

FALSE COLOR

CHECK FIELD

























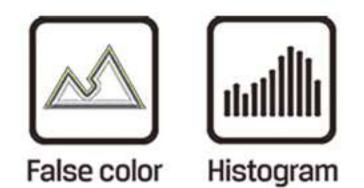














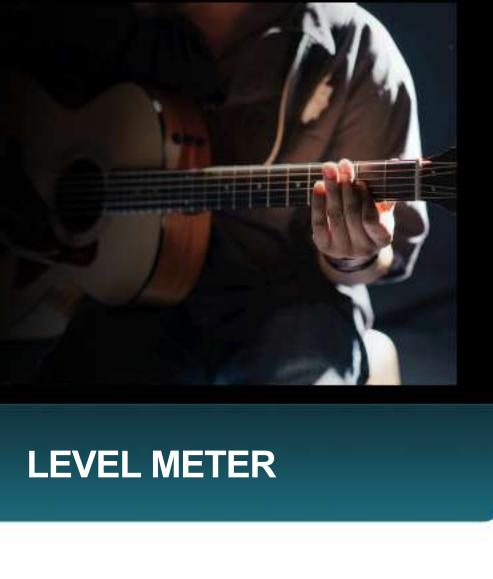





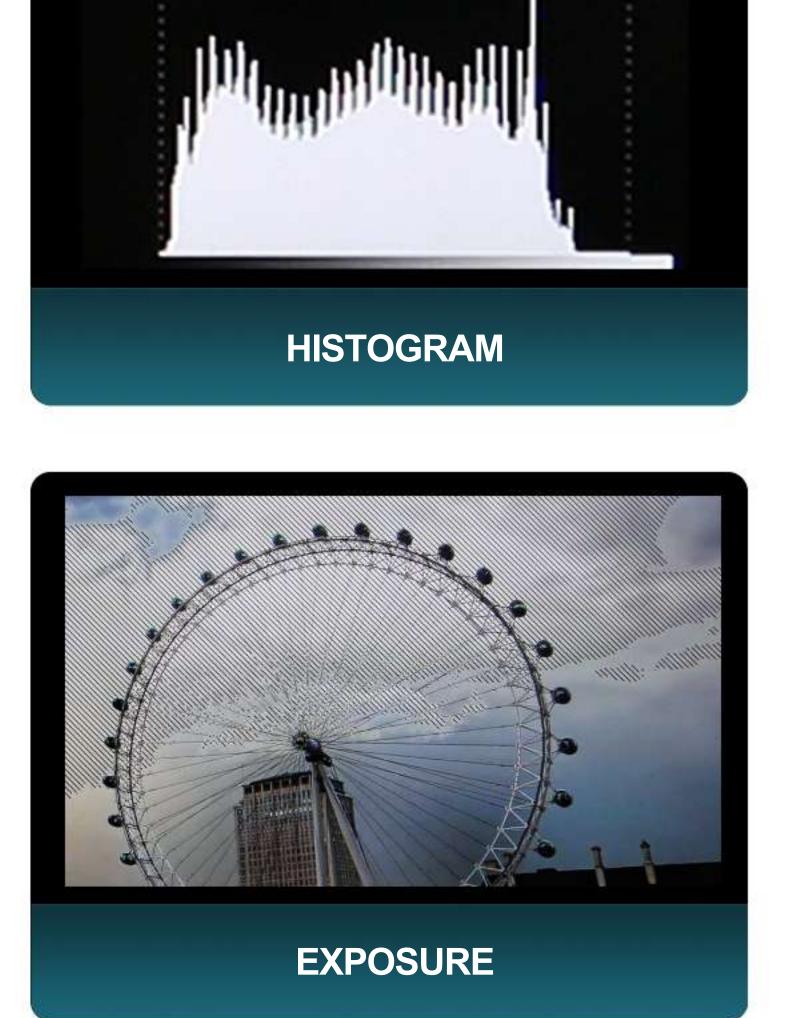

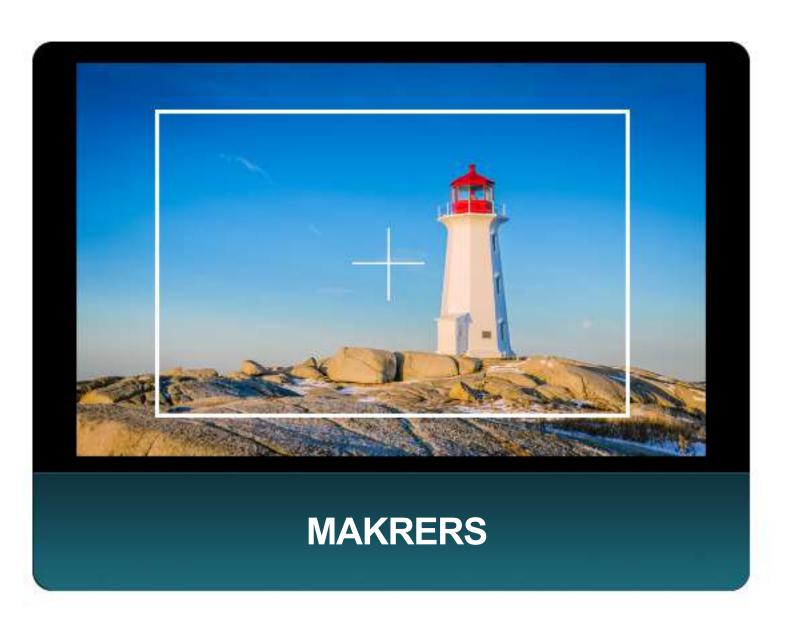





DISPLAYPanel5.4Physical Resolution19Aspect Ratio16Brightness60Contrast11Viewing Angle16HDRSTSupported Log FormatsSkLUT Support3CINPUT3G-SDIOUTPUT10FORMATSNDMIAUDIOSpeakerPOWERInput VoltagePOWERInput VoltageENVIRONMENTOperating TemperatureDIMENSIONWeight			
DISPLAYAspect Ratio16Brightness60Contrast11Viewing Angle16HDRSTSupported Log FormatsSlaLUT Support3DINPUTHDMI1 (OUTPUT3G-SDI1HDMI1 (SDI10FORMATSSpeaker1AUDIOSpeaker1POWERInput VoltageDCBattery PlateNFPower Consumption9Operating Temperature-20Storage Temperature-30DIMENSIONDimension(LWD)15		Panel	5.4
DISPLAYBrightness60Contrast11Viewing Angle16HDRSTSupported Log FormatsSkLUT Support3DINPUT3G-SDI1HDMI1 (OUTPUT3G-SDI1FORMATSSDI10FORMATSSpeaker1AUDIOEar Phone Slot1POWERDimension(LWD)00ENVIRONMENTOperating Temperature-20DIMENSIONDimension(LWD)15		Physical Resolution	19
DISPLAYContrast11Viewing Angle16HDRSTSupported Log FormatsStLUT Support3DINPUT3G-SDI1HDMI1 (OUTPUT3G-SDI1HDMI1 (FORMATSSDI10FORMATSSDI10AUDIOSpeaker1POWERInput VoltageDOBattery PlateNFPower Consumption99Operating Temperature-20Storage Temperature-30DIMENSIONDimension(LWD)15		Aspect Ratio	16
Viewing Angle16HDRSTSupported Log FormatsSkLUT Support3DINPUT3G-SDI1HDMI1 (OUTPUTHDMI1 (FORMATSSDI10FORMATSHDMI21AUDIOSpeaker1POWERInput VoltageDOBattery PlateNFPower ConsumptionS9Operating Temperature-20Storage Temperature-30DIMENSIONDimension(LWD)15		Brightness	60
Viewing Angle16HDRSTSupported Log FormatsSkLUT Support3D3G-SDI1HDMI1 (OUTPUT3G-SDIHDMI1 (SDI10FORMATSHDMIAUDIOSpeakerPOWERInput VoltagePOWERInput VoltagePower ConsumptionS9Operating Temperature-20Storage Temperature-30DIMENSIONDimension(LWD)	DISPLAY	Contrast	11
Supported Log FormatsSkLUT Support3D3G-SDI1HDMI1 (OUTPUT3G-SDIHDMI1 (FORMATSSDIHDMI1 (Speaker1AUDIOEar Phone SlotPOWERInput VoltagePOWERDimension(LWD)IMFNSIONDimension(LWD)		Viewing Angle	16
LUT Support3DINPUT3G-SDI1HDMI1 (OUTPUT3G-SDI1HDMI1 (FORMATSHDMI1 (AUDIOSpeaker1AUDIOEar Phone Slot1Current0.7POWERInput VoltageDOBattery PlateNFPower Consumption≤9Operating Temperature-20DIMENSIONDimension(LWD)15		HDR	ST
INPUT3G-SDI1HDMI1 (OUTPUT3G-SDIHDMI1 (SDI10FORMATSHDMIAUDIOSpeakerAUDIOEar Phone SlotPOWERInput VoltageBattery PlateNFPower Consumption9Operating Temperature-20DIMENSIONDimension(LWD)		Supported Log Formats	Slo
INPOTHDMI1 (OUTPUT3G-SDI1HDMI1 (FORMATSSDIAUDIOSpeaker1AUDIOEar Phone Slot1Current0.7POWERInput VoltageDOBattery PlateNFPower Consumption≤9Operating Temperature-20Storage Temperature-30DIMENSIONDimension(LWD)15			30
OUTPUTHDMI1 (OUTPUT3G-SDI1HDMI1 (FORMATSSDI10HDMI21AUDIOSpeaker1ENVIRONMENTCurrent0.7DIMENSIONOperating Temperature-20DIMENSIONDimension(LWD)15	INPUT	3G-SDI	1
OUTPOTHDMI1 ( SDIFORMATSHDMI21AUDIOSpeaker1AUDIOEar Phone Slot1POWERInput VoltageDOPOWERPower Consumption≤9ENVIRONMENTOperating Temperature-20DIMENSIONDimension(LWD)15		HDMI	1 (
FORMATSHDMI1 ( SDIAUDIOHDMI21AUDIOSpeaker1ENVIRONMENTCurrent0.7DIMENSIONDimension(LWD)15	OUTPUT		1
FORMATSHDMI21AUDIOSpeaker1Ear Phone Slot1Current0.7POWERInput VoltageDOBattery PlateNFPower Consumption≤9Operating Temperature-20Storage Temperature-30DIMENSIONDimension(LWD)			1 (
AUDIOSpeaker1AUDIOEar Phone Slot1Ear Phone Slot1Current0.7Input VoltageDOBattery PlateNFPower Consumption≤9Operating Temperature-20Storage Temperature-30DIMENSIONDimension(LWD)	FORMATS		
AUDIOEar Phone Slot1Current0.7Current0.7Input VoltageDOBattery PlateNFPower Consumption≤9Operating Temperature-20DIMENSIONDimension(LWD)			21
POWERCurrent0.7Input VoltageDOBattery PlateNFPower Consumption≤9Operating Temperature-20DIMENSIONDimension(LWD)			1
POWERInput VoltageDOBattery PlateNFPower Consumption≤9ENVIRONMENTOperating Temperature-20DIMENSIONDimension(LWD)15			1
POWER Battery Plate NF   Battery Plate NF Power Consumption ≤9   ENVIRONMENT Operating Temperature -20   DIMENSION Dimension(LWD) 15			
Battery PlateINFBattery PlateINFPower Consumption≤9Operating Temperature-20Operating Temperature-30DIMENSIONDimension(LWD)			
ENVIRONMENTOperating Temperature-20DIMENSIONStorage Temperature-30Dimension(LWD)15			
ENVIRONMENTStorage Temperature-30DIMENSIONDimension(LWD)15		-	
DIMENSION DIMENSION 15			
		· ·	
veignt 29			
		veigni	29


STANDARD



12V 2A DC Power Adapter



0.8M HDMI A-C Cable

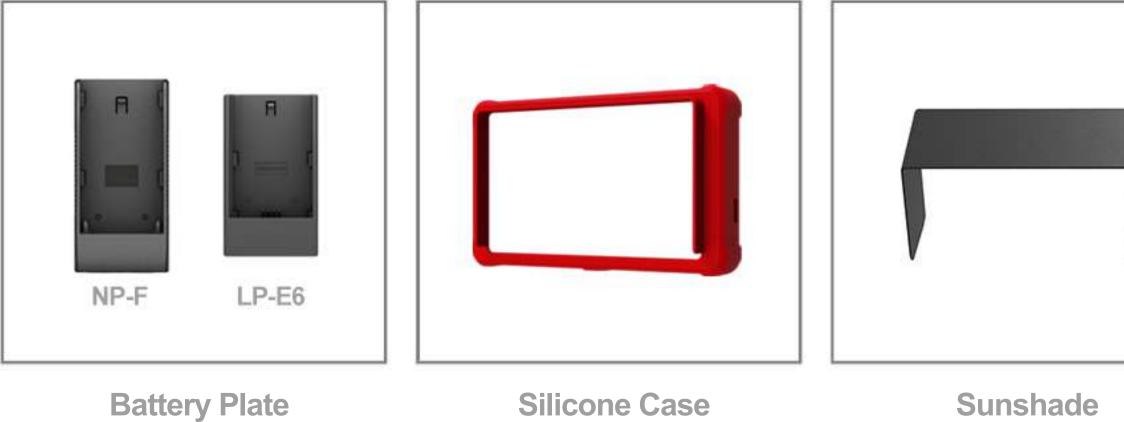

**Battery Plate** 

www.lilliput.com

5.4" LTPS 920×1200 6:10 500cd/m<sup>2</sup> 100:1 160°/ 160° (H/V) ST 2084 300/1000/10000 / HLG Slog2 / Slog3, Arrilog, Clog, Jlog, Vlog, Nlog or User... BD-LUT (.cube format)

1 (HDMI 2.0, supports up to 4K 60Hz)

1 (HDMI 2.0, supports up to 4K 60Hz) 1080p 60/50/30/25/24, 1080pSF 30/25/24, 1080i 60/50, 720p 60/50... 2160p 60/50/30/25/24, 1080p 60/50/30/25/24, 1080i 60/50, 720p 60/50...

).75A (12V) DC 7-24V NP-F / LP-E6 9W 20°C~50°C -30°C~70°C 54.5×90×20mm 295g







Sunshade

Hot Shoe Mount

Mini USB to USB-A Connector

ZHANGZHOU LILLIPUT ELECTRONIC TECHNOLOGY CO., LTD.

Add:Fuqi North Road, No.26, Zhang Zhou, Fu Jian, 363005, China Tel: +86-596-2109661/2109323 Facebook: @lilliputmonitor Email: sales@lilliput.com

