

LILLIPUT®

21.5" 1000 NITS LIVE STREAM RECORDING MONITOR

High brightness live streaming monitor with recording function. Application for video push/pull streaming & live streaming

Model No.: PVM220S-E





RECORD

With SD Card
Video recording via SD card,
supports overwriting function
when recording.


Recording Function

When setting the format of the recorded video, users can choose from Bitrate, Encoding, Resolution, FPS and other options.



Record playback

When the video recording is completed, users can select video playback in the menu.

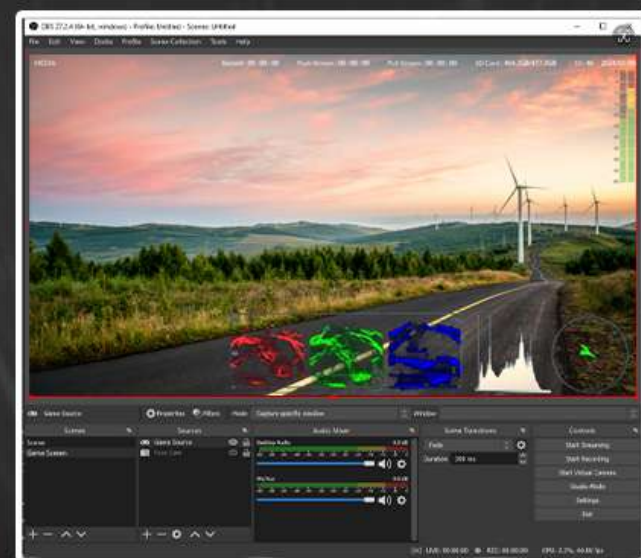

Push Stream to 3 Platforms

Supports to push stream to 3 different live streaming platforms at the same time.



LAN

For PC or Router Connecting

Make sure the network is smooth and connect the push address of the live stream platform to share your unique ideas.



USB UPLOAD

For Push / Pull Stream Address

Create a text file to the USB flash drive to upload the push / pull stream address.



Pull Stream From Network

Uploading the pull streaming address from the USB flash drive and show the creative ideas through the network.

HDR

SUPPORT ST2084 300/1000/10000 / HLG

Making lighter and darker details to be displayed more clearly. Under 1000 nits brightness, it can show the effect of $1+1 \geq 2$.



1000 NITS

FOR DAYTIME WITH STRONG SUNLIGHT

The high brightness screen makes it possible to see the image clearly even when it is exposed to sunlight.



BROADCAST



LUT OFF



LUT ON

FILMMAKING



LIVE STREAM

3D-LUT

Import LUT tables via USB to dye your scenes with different colors. It can quickly recombine color tone to form different color styles.

Built-in 3D-LUT, featuring 17 default logs and 6 user logs.

Camera Assist Functions



Full Screen Waveform

Full Screen Vectorscope


False Color

User Markers

- Record
- Push/Pull
- Color Temp
- Color Space
- 3D-LUT
- HDR
- Gamma
- UMD
- Time code
- Vector scope
- Waveform
- Level meter
- Histogram
- Exposure
- Peaking
- False color
- Check field
- Color bar
- Pixel zoom
- Pix to pix
- Marker
- Freeze
- H/V Delay

INTERFACES & BATTERY PLATE

The back of broadcast monitor is equipped with VESA 75mm / 100mm installation options, which is compatible with the installation of most light stands and battery plates. The battery plate can be selected from V-lock battery plate and Anton Bauer battery plate.

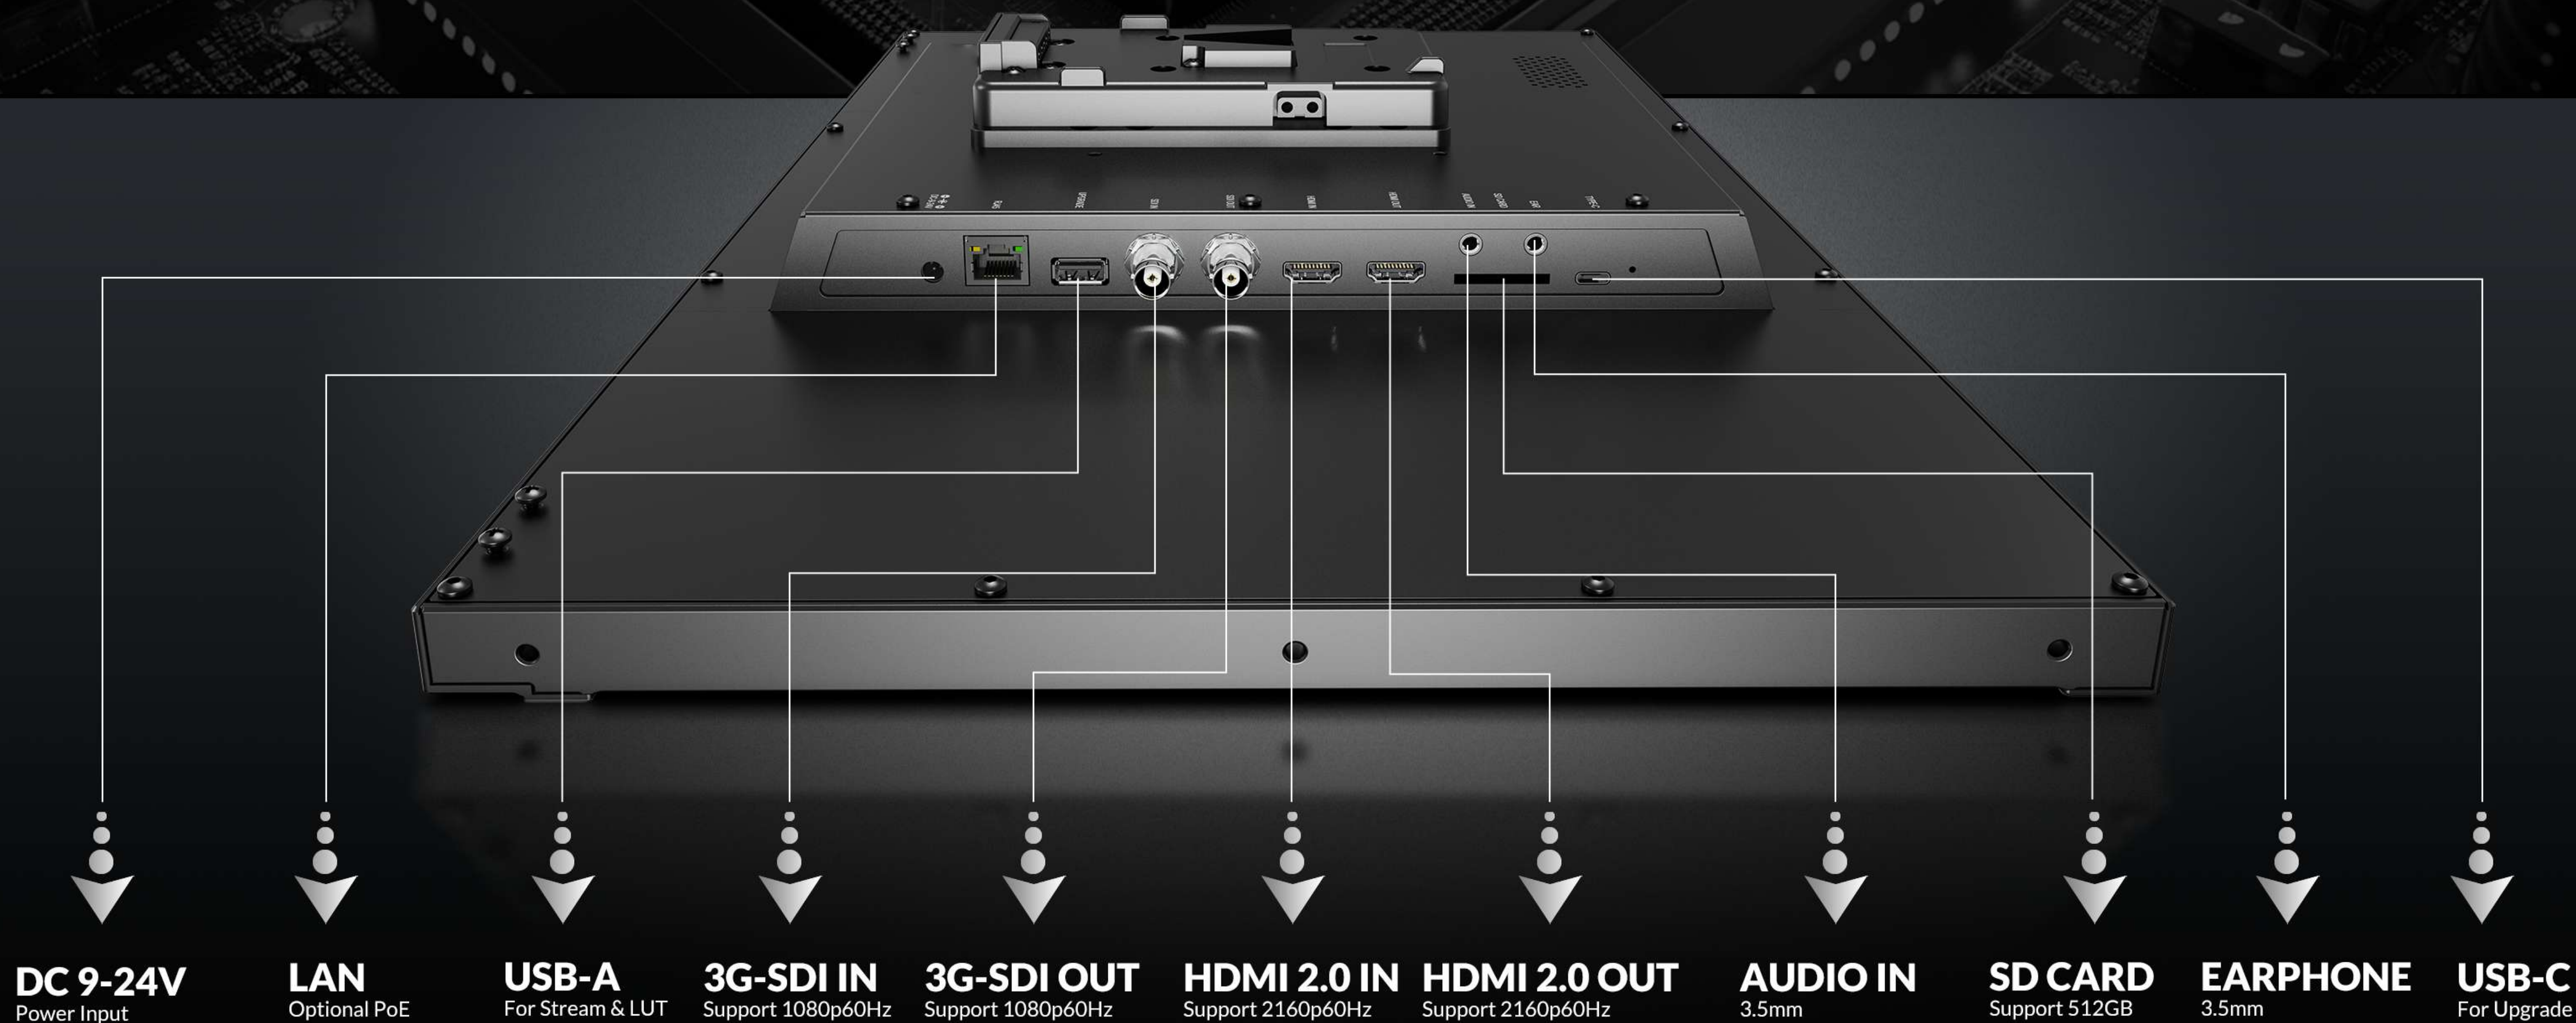



ACCESSORIES

STANDARD



15V 4A DC Adapter




Base Bracket



E-User Manual

OPTIONAL

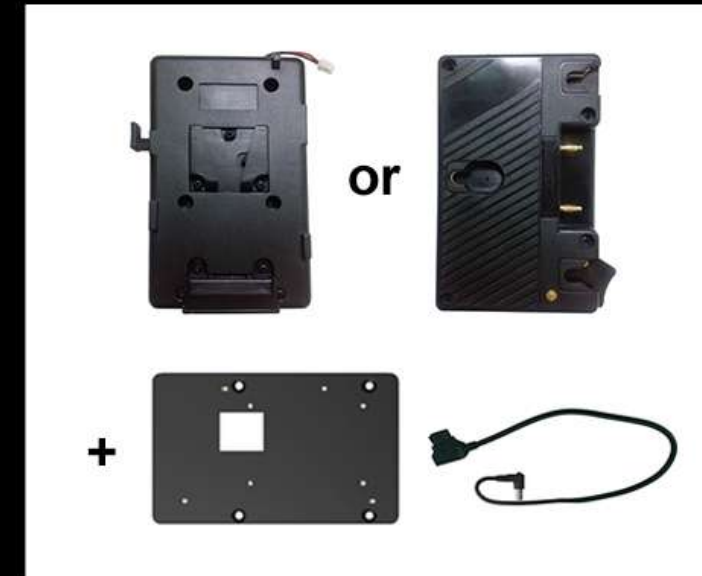

Battery Plate + D-Tap Cable



Carrying Case + Sunshade



Rack Mount Bracket
(for carrying case)

SPECIFICATIONS

PVM220S-E

DISPLAY	Panel	21.5"
	Physical Resolution	1920×1080
	Aspect Ratio	16:9
	Brightness	1000cd/m ²
	Contrast	1000:1
	Viewing Angle	178°/ 178°(H/V)
	HDR	ST2084 300/1000/10000/HLG
	Supported Log formats	SLog2 / SLog3 / CLog / NLog / ArriLog / JLog or User...
	Look up table (LUT) support	3D LUT (.cube format)
VIDEO INPUT	SDI	1×3G
	HDMI	1×HDMI 2.0
VIDEO LOOP OUTPUT	SDI	1×3G
	HDMI	1×HDMI 2.0
	LAN	1×1000M, PoE is optional
SUPPORTED FORMATS	SDI	1080p 24/25/30/50/60, 1080pSF 24/25/30, 1080i 50/60...
	HDMI	2160p 24/25/30/50/60, 1080p 24/25/30/50/60, 1080i 50/60, 720p 50/60...
	IP	Push / Pull Streaming: YCbCr 4:2:2 Video code (Support up to 32 Mbps@1080p60)
RECORDING	Video Resolution	1920×1080 / 1280×720 / 720×480
	Frame Rates	60 / 50 / 30 / 25 / 24
	Codes	H.264
	Audio SR	44.1kHz / 48kHz
	Storage	SD Card, support 512GB
	Split Rec File	1min / 5 mins / 10 mins / 20 mins / 30 mins / 60 mins
Audio In/Out (48kHz PCM Audio)	SDI	2ch 48kHz 24-bit
	HDMI	8ch 24-bit
	Ear Jack	3.5mm
	Built-in Speakers	1
POWER	Input Voltage	DC 9-24V
	Power Consumption	≤53W (DC 15V / Optional PoE PD function, supports IEEE802.3 bt protocol)
	Compatible battery type	V-Lock or Anton Bauer Mounts (Optional)
	Input voltage (battery)	14.8V nominal
ENVIRONMENT	Operating Temperature	0°C~50°C
	Storage Temperature	-20°C~60°C
OTHER	Dimension(LWD)(mm)	508×321×47
	Weight	4.75kg

Note: Due to constant effort to improve products and product features, specifications may change without notice.

