






Make it simple during filmmaking & live events, distance is no longer an issue.






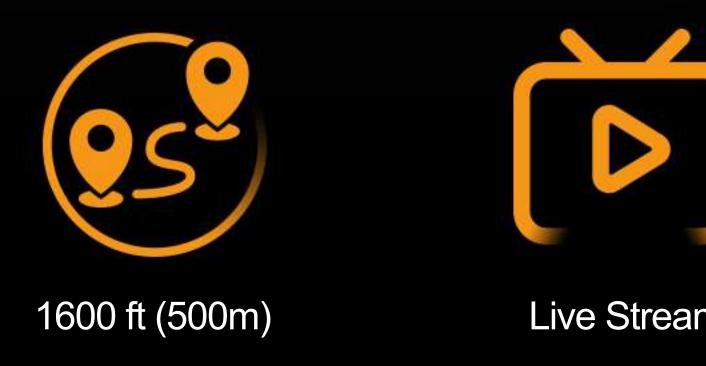

0.08s Low Latency






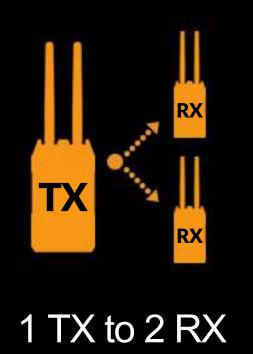

HDMI/SDI Wireless Transmission



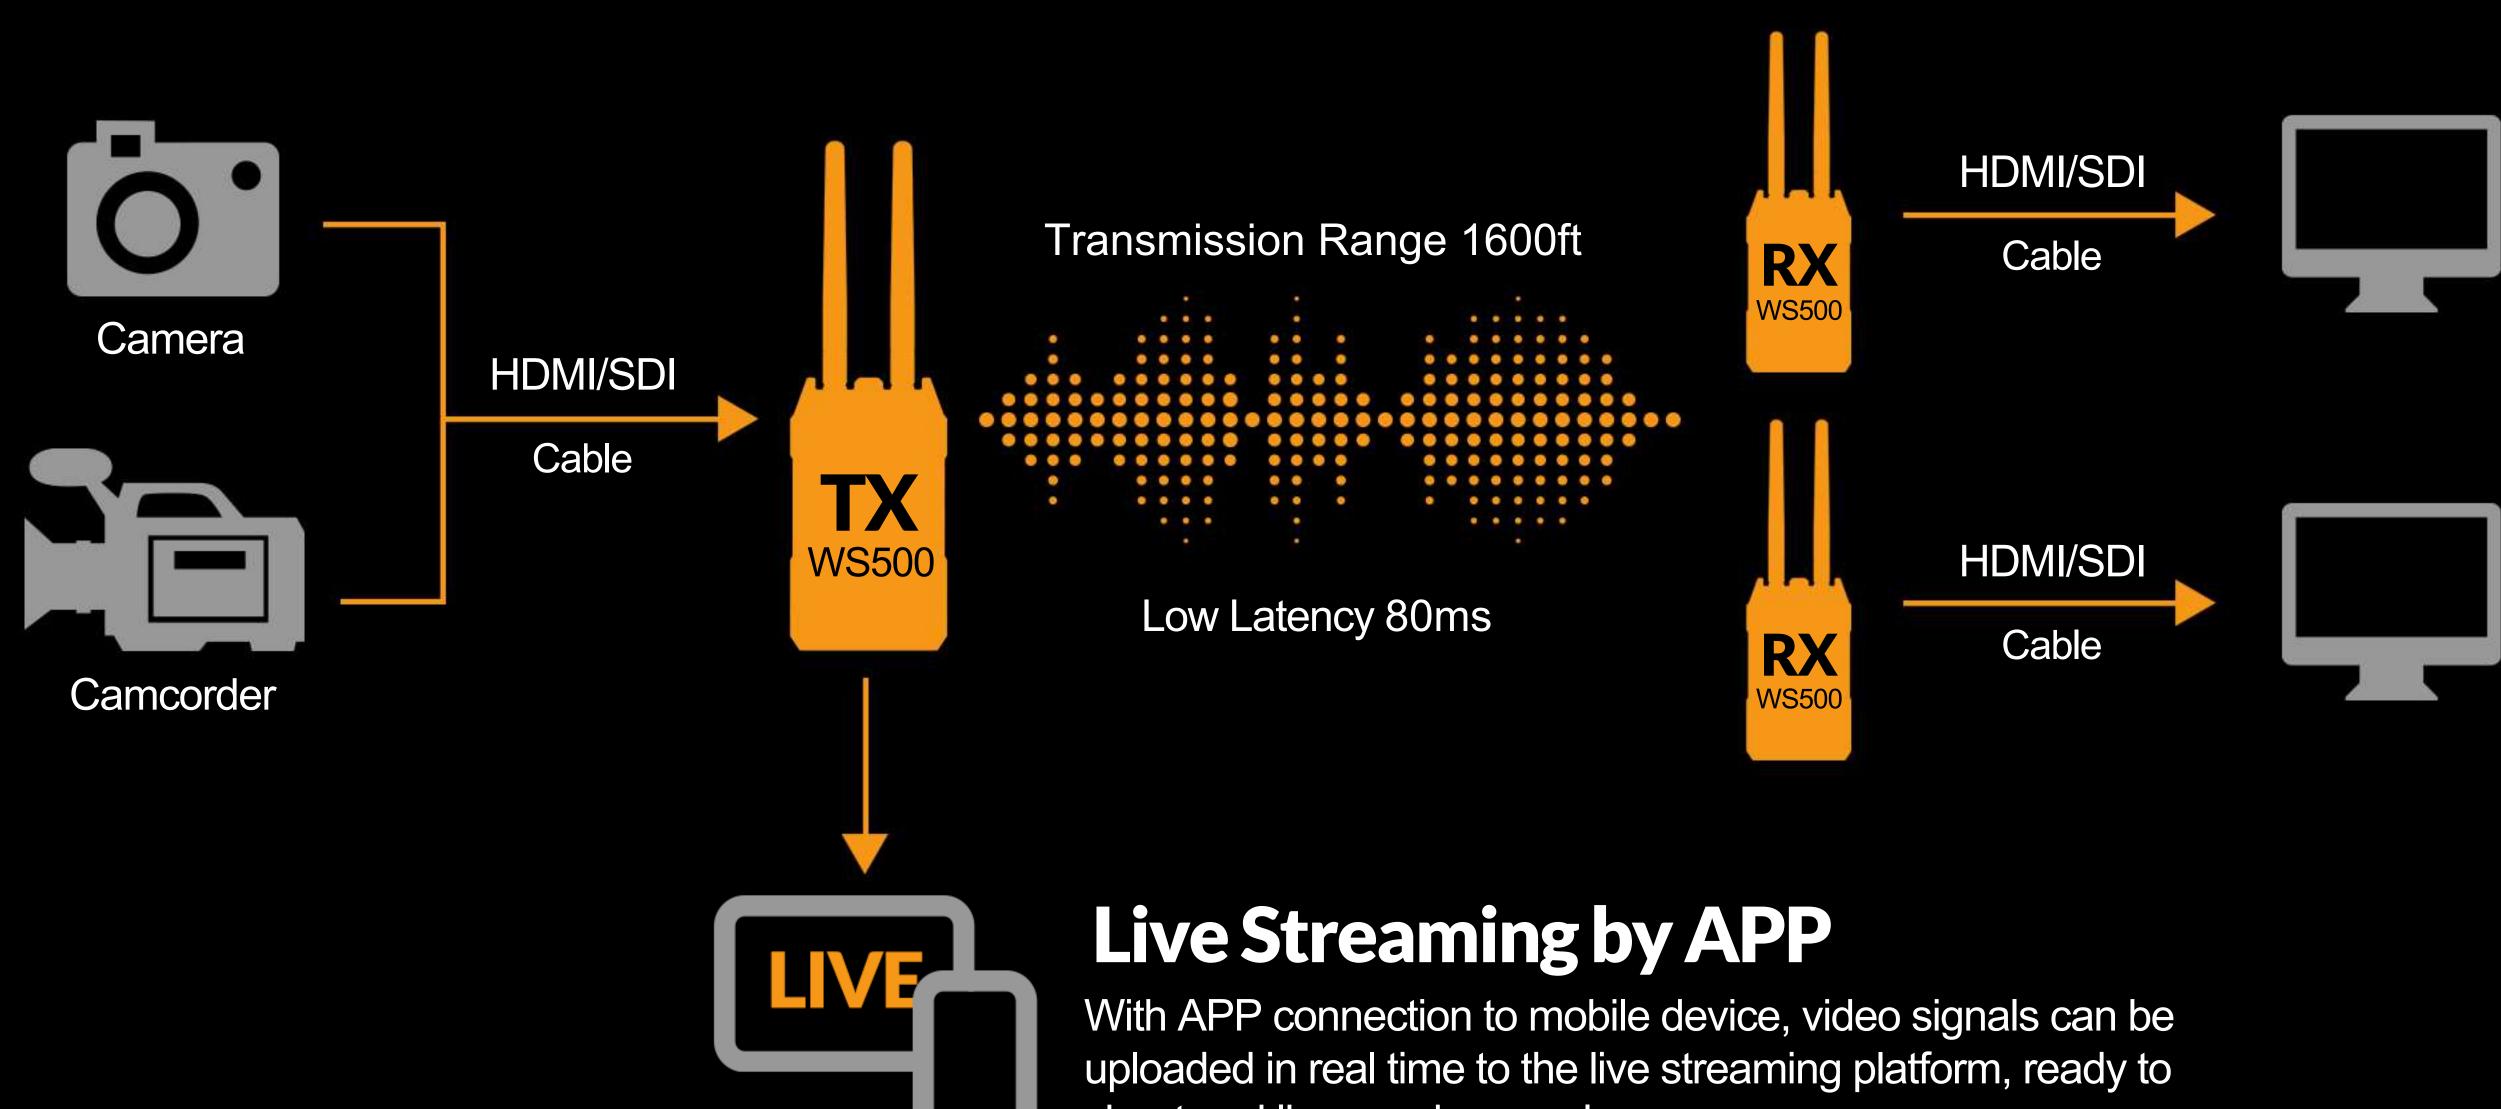



On Set


Making your connections flexible and simple! Whether camera is providing an HDMI or SDI signal, you will be able to switch between HDMI and SDI by using wireless transmitter.

shoot and live synchronously.



On Location

Live Stream

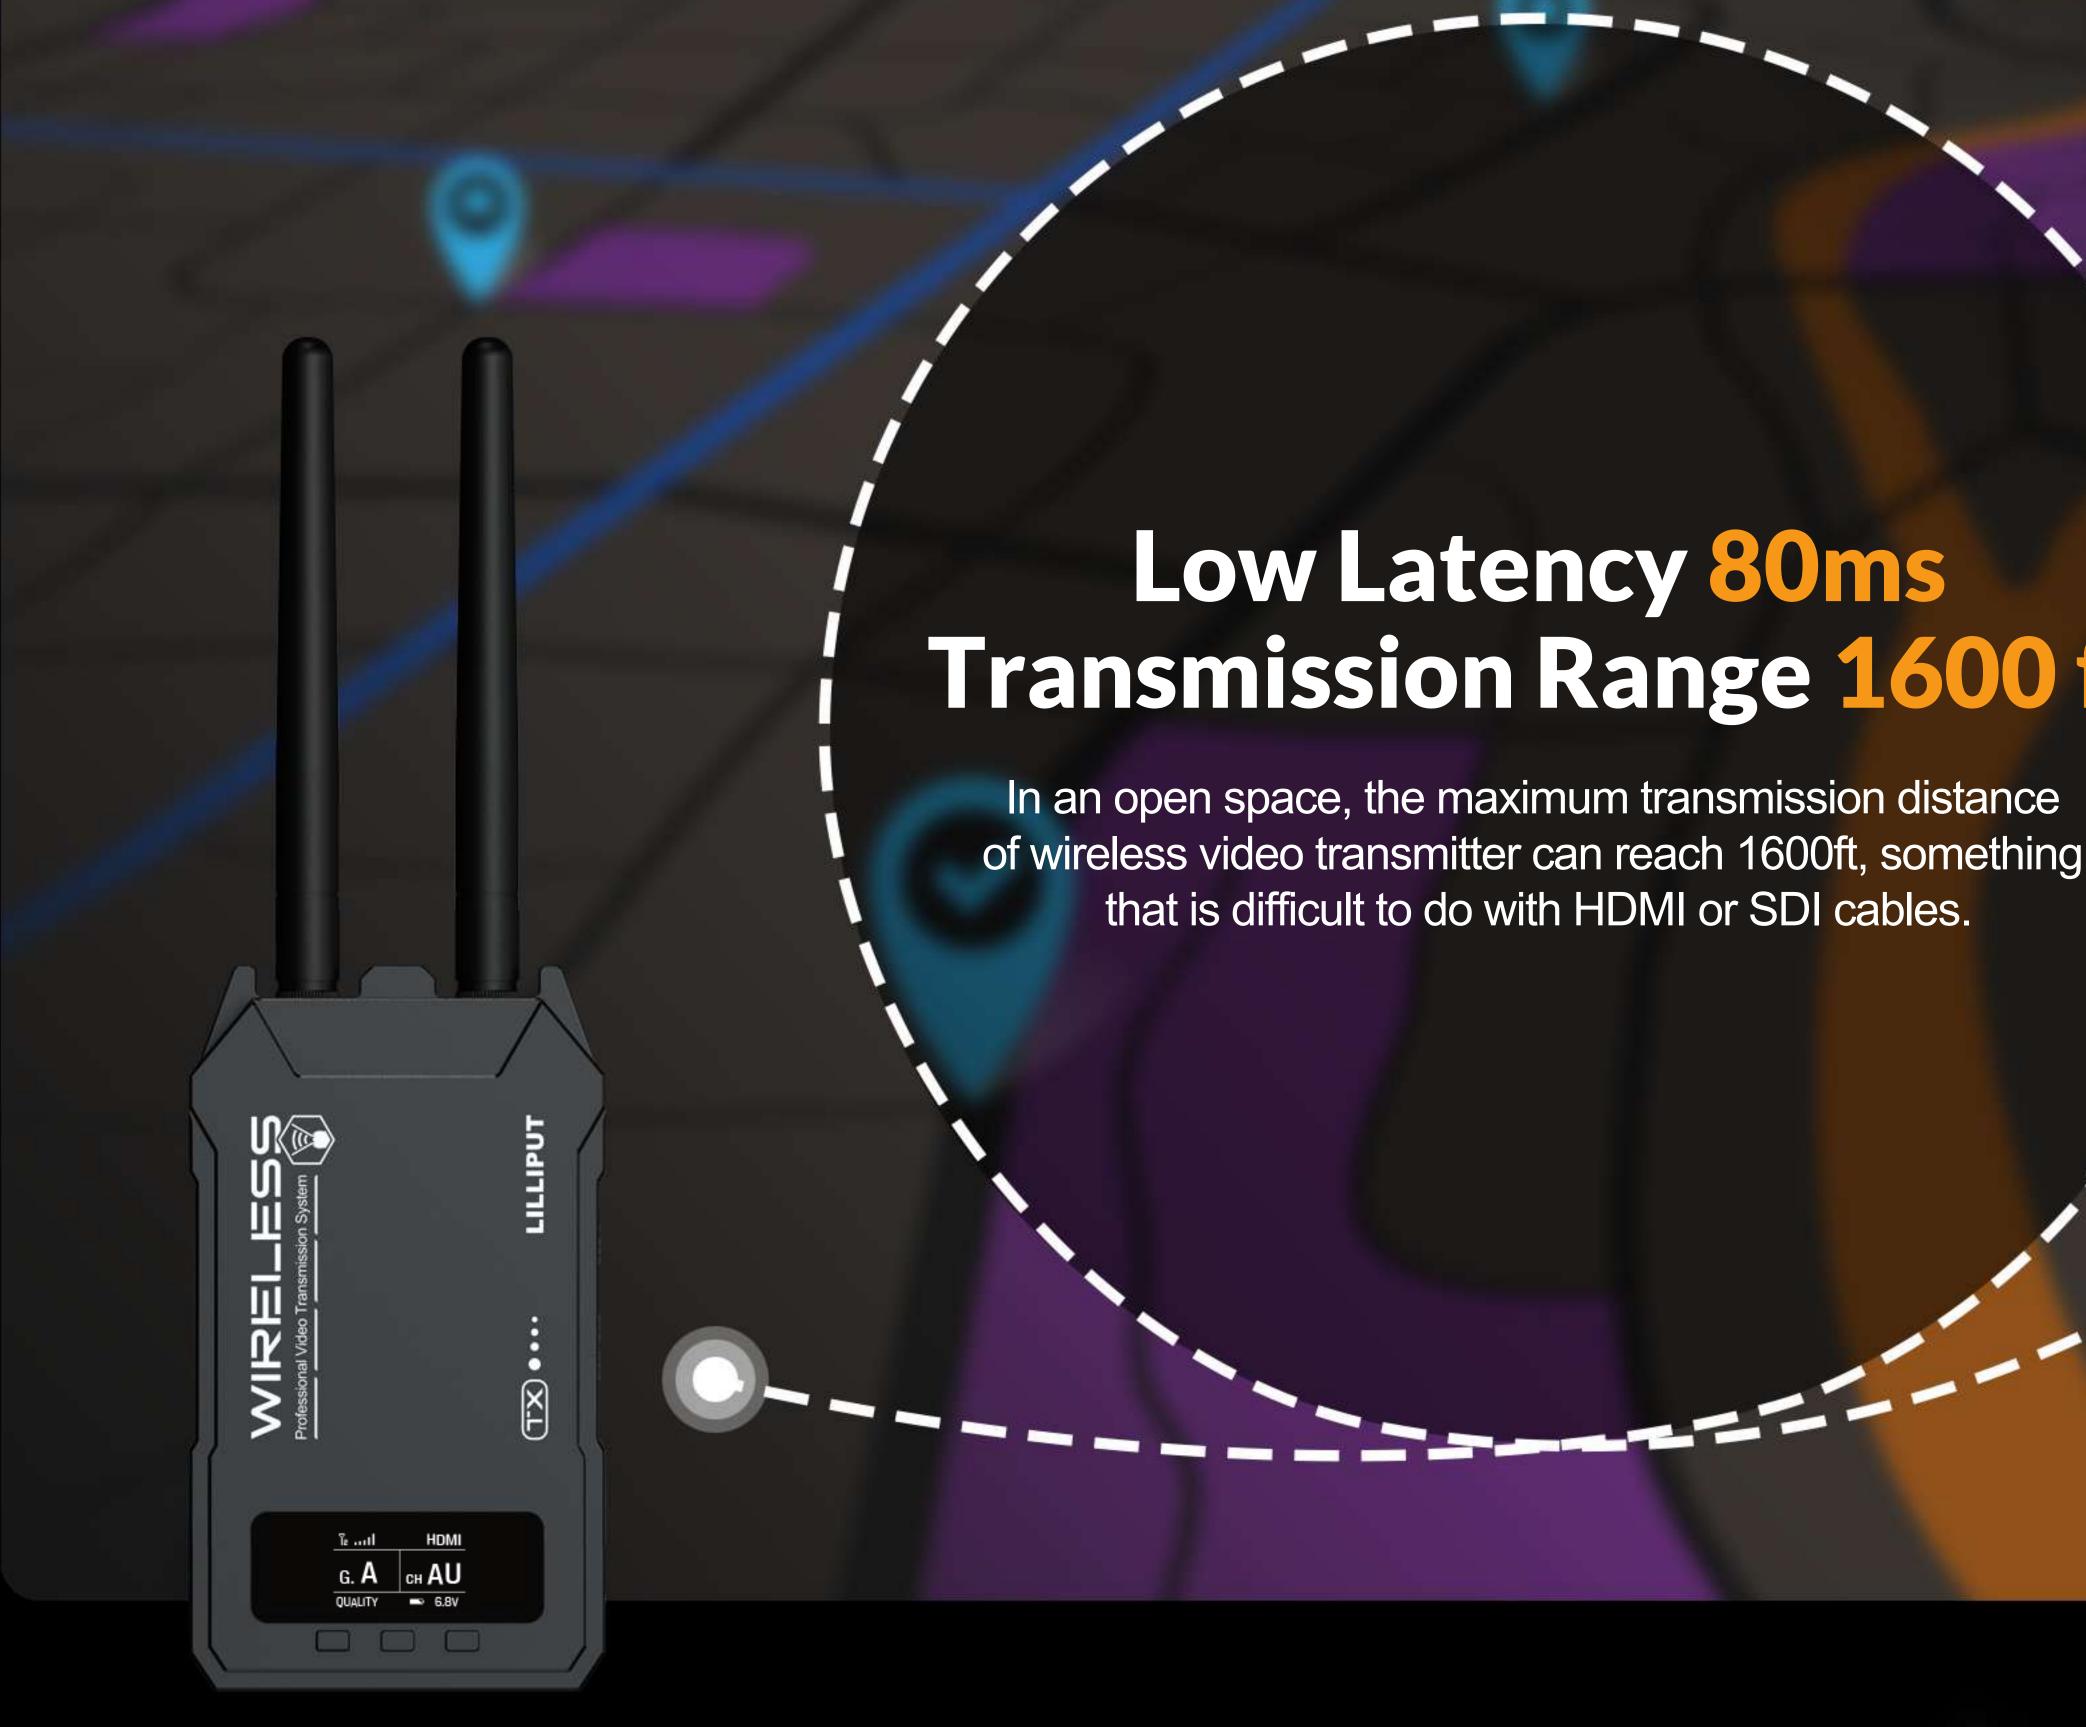



Automatic search for quality channels among 13 signal channels. Enabling quality channels prevents signal from interruptions and reduces latency.

		пппри
		• (Xਖ਼
G. A	но снА	


Low Latency 80ms Transmission Range 1600 ft


of wireless video transmitter can reach 1600ft, something that is difficult to do with HDMI or SDI cables.



Profesional APP For Video Monitoring

The easy-to-use, functional APP provides rich auxiliary functions that professional broadcast monitors have, so as to get a satisfying shot at your fingertips.

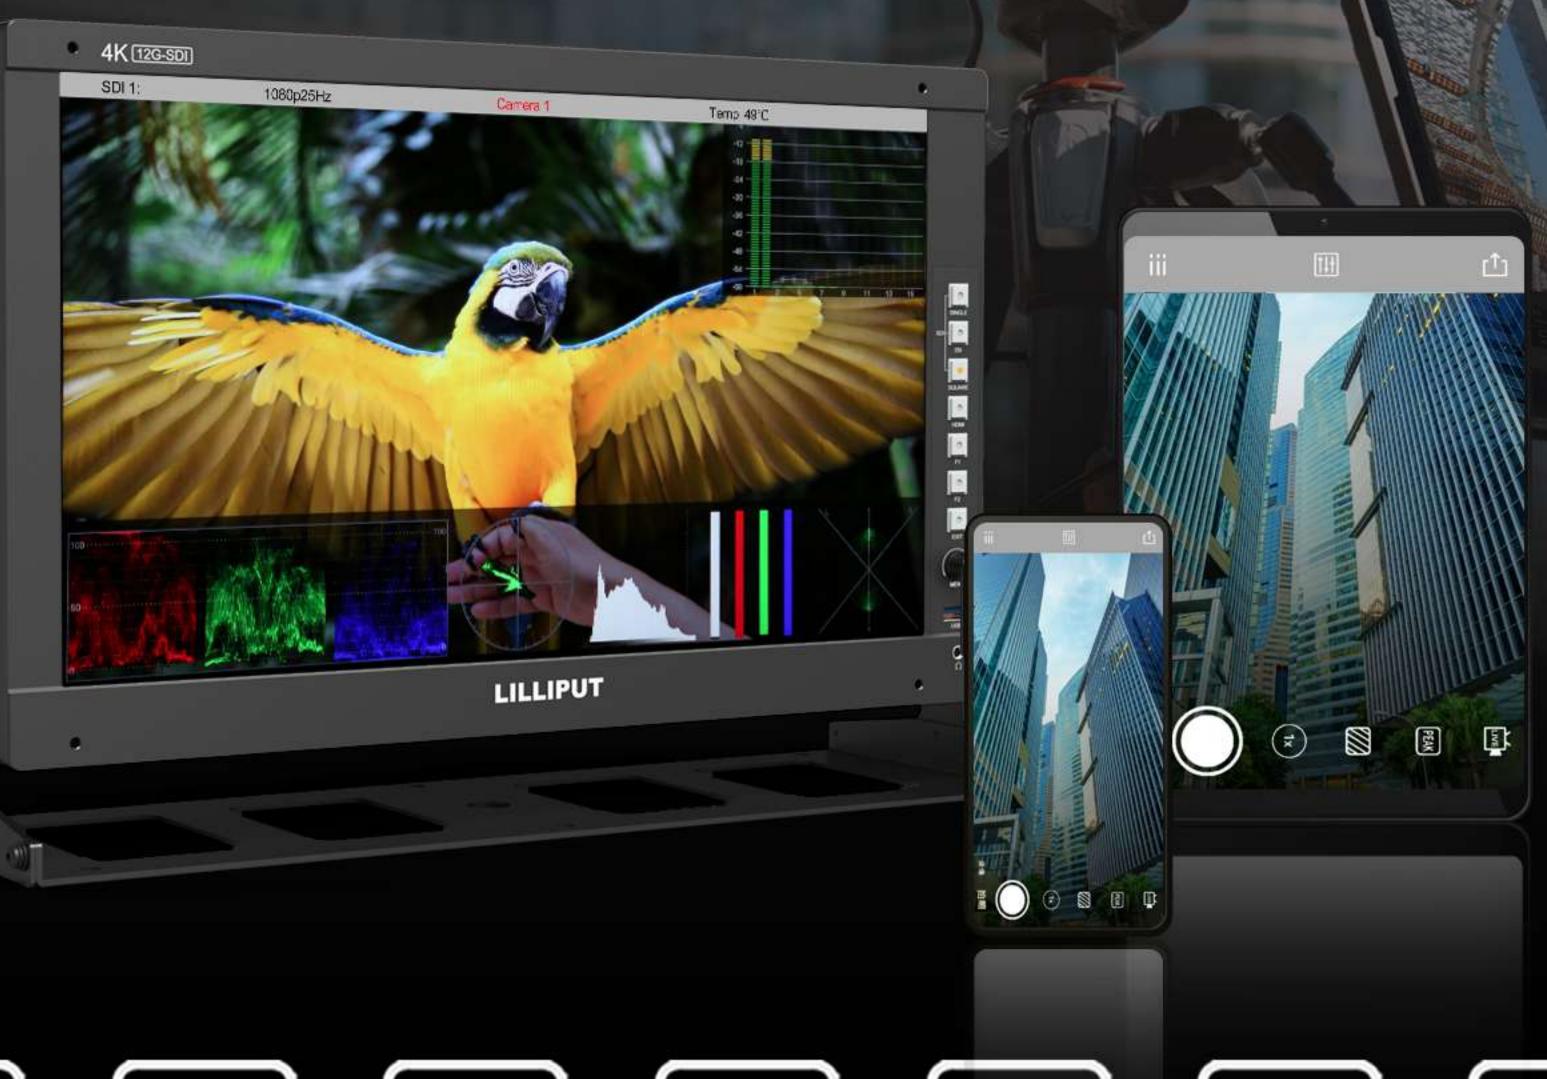

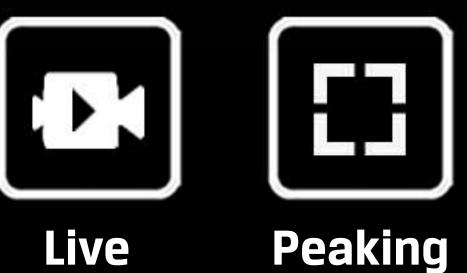







Peaking Exposure

Zoom In Markers





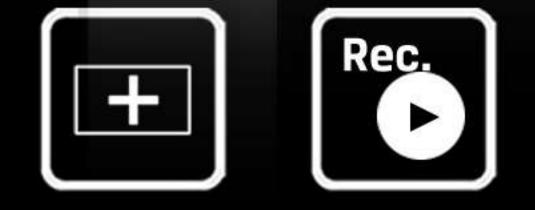

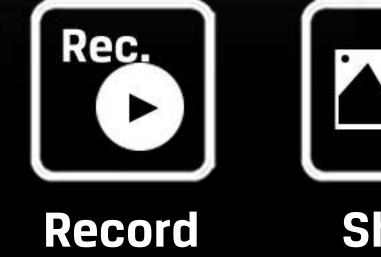



Ë APP Scan On QR Code



Fanless Design

The combination of ultra-low power consumption and fanless design gives it a small and compact appearance.



Compact LED Screen

FECEUK

2

1.3" LED screen showing the current status of the wireless transmitter.



Dual Power Supply

Powered by Sony NP-F series batteries, or by USB-C with a power bank.




HDMI In / Out and SDI In / Out interfaces can be connected for different devices.

Specifications

DISPLAY	Screen	1.3" OLED	
VIDEO SIGNALS	HDMI In	1080p 23.98/24/25/29.97/30/50/59.94/60, 1080i 50/60, 720p 50/60	
	3G-SDI In	1080p 23.98/24/25/29.97/30/50/59.94/60, 1080i 50/60, 720p 50/60	
	HDMI Out	1080p 23.98/24/25/29.97/30/50/59.94/60, 1080i 50/60, 720p 50/60	
	3G-SDI Out	1080p 23.98/24/25/29.97/30/50/59.94/60, 1080i 50/60, 720p 50/60	
AUDIO SIGNALS	Audio	48kHz 24-bit	
TRANSMISSION	Latency	80ms (From transmitter to receiver, no interference)	
	Frequency	5GHz	
	Transmission Power	17dBm	
	Transmission Distance	1600ft (No interference)	
POWER	Input Voltage	DC 5V	
	Power Consumption	≤3.5W	
ENVIRONMENT	Operating Temperature	0°C~50°C	
	Storage Temperature	-20°C~60°C	
DIMENSION	Dimension(LWD)	113mm × 65mm × 29.2mm	
	Weight	200g each	



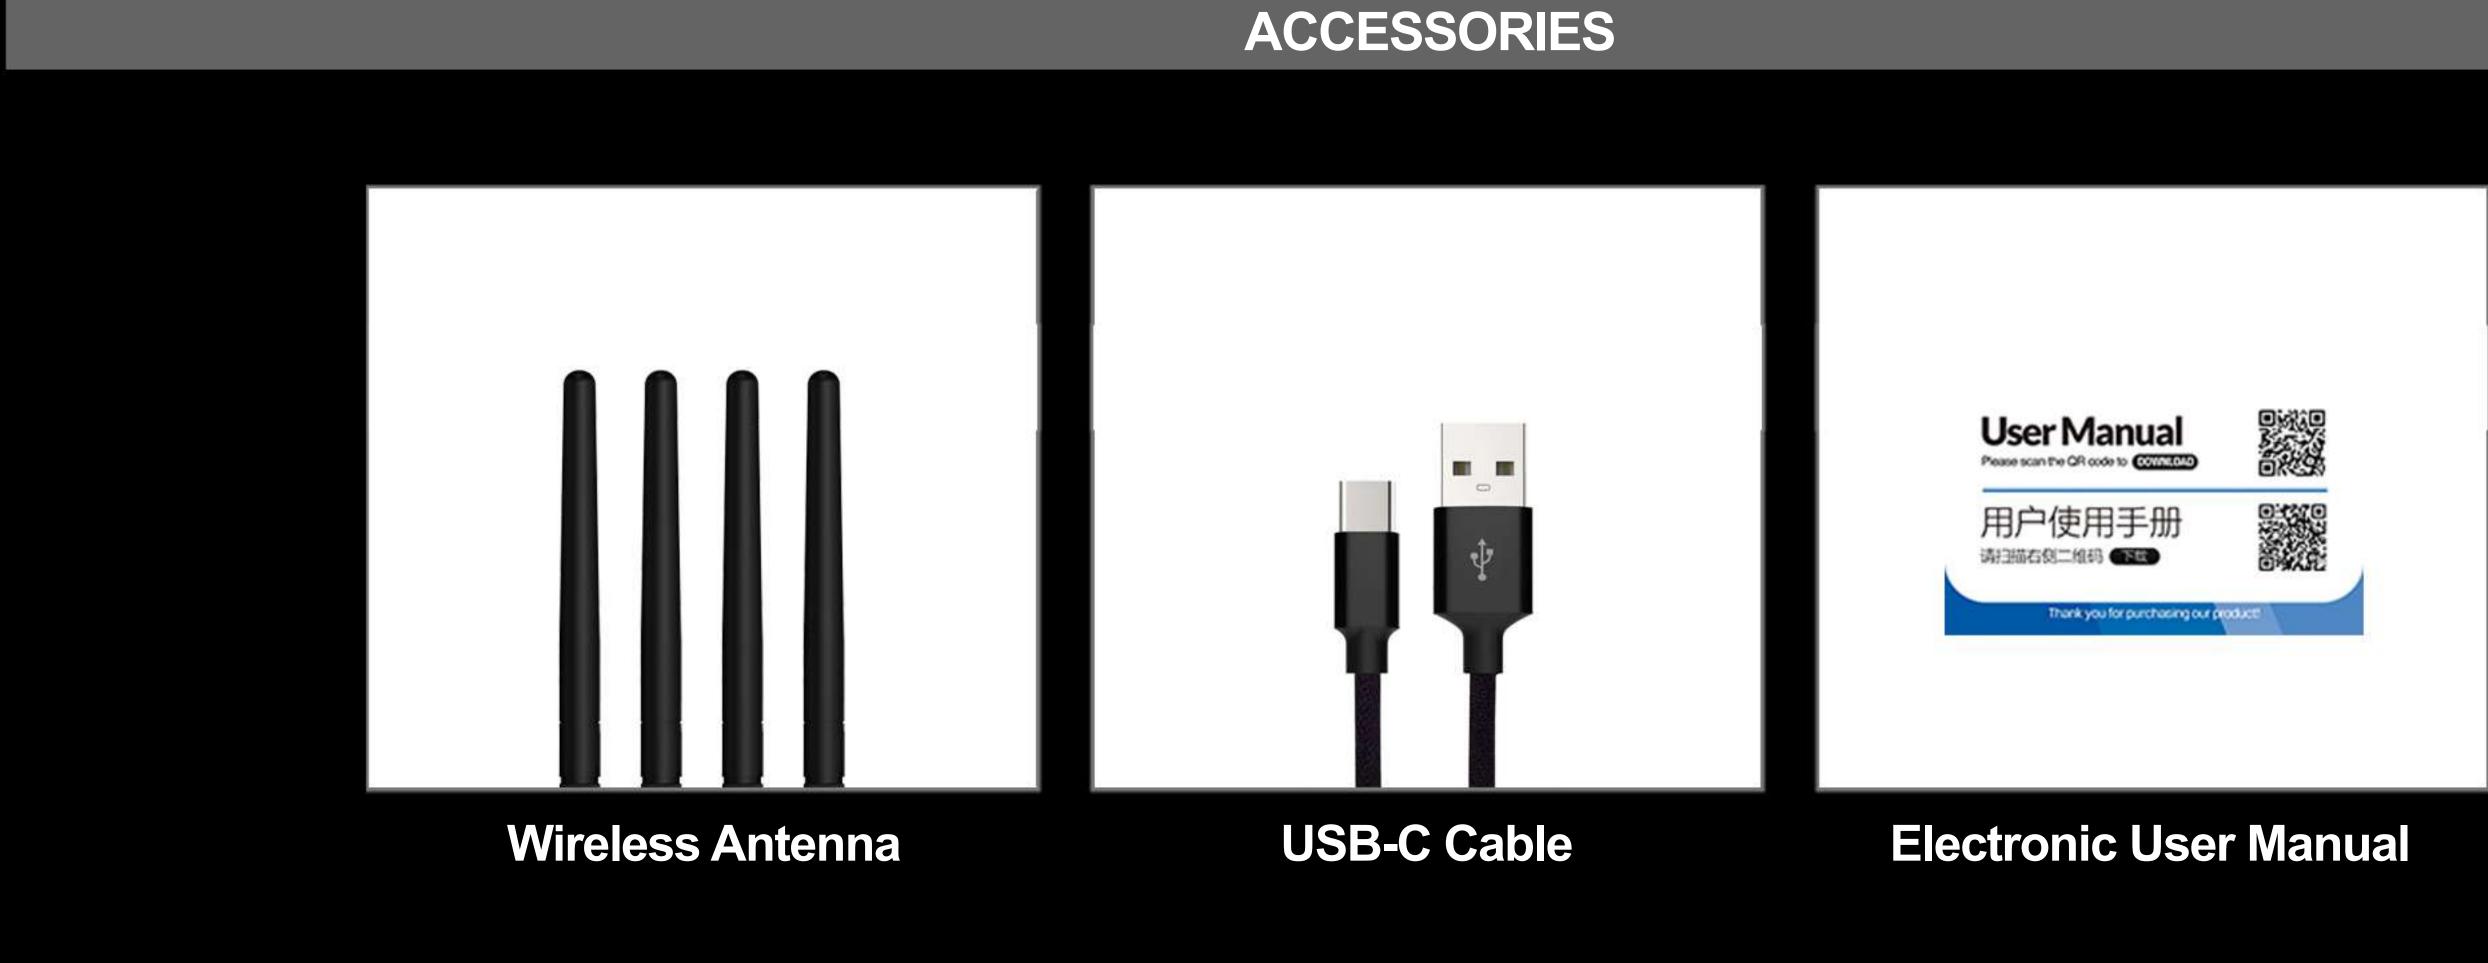



ZHANGZHOU LILLIPUT ELECTRONIC TECHNOLOGY CO., LTD.

Add:Fuqi North Road No.26, Zhang Zhou, Fu Jian, 363005, China Tel: +86-596-2109661/2109323 Facebook: @lilliputmonitor Email: sales@lilliput.com

