LILLIPUT®

www.lilliput.com







10-Point Touch







Rich Interfaces IP64 Rating


Metal Housing

7" TOUCH SCREEN MONITOR

The monitor comes with a 10-point touch screen and 1000nits high brightness screen panel. The interfaces support a wide range of customisation options in addition to the existing types such as HDMI, VGA, AV, etc. Its IP64 front panel design is a great convenience for installation methods and applications.

1000 nits & 10-Point Capacitive Touch

Selection of high-quality industrial-grade screen on the market, which not only has prominent color representation, but also high brightness of 1000 nits screen makes it suitable for outdoor sunlight environment.

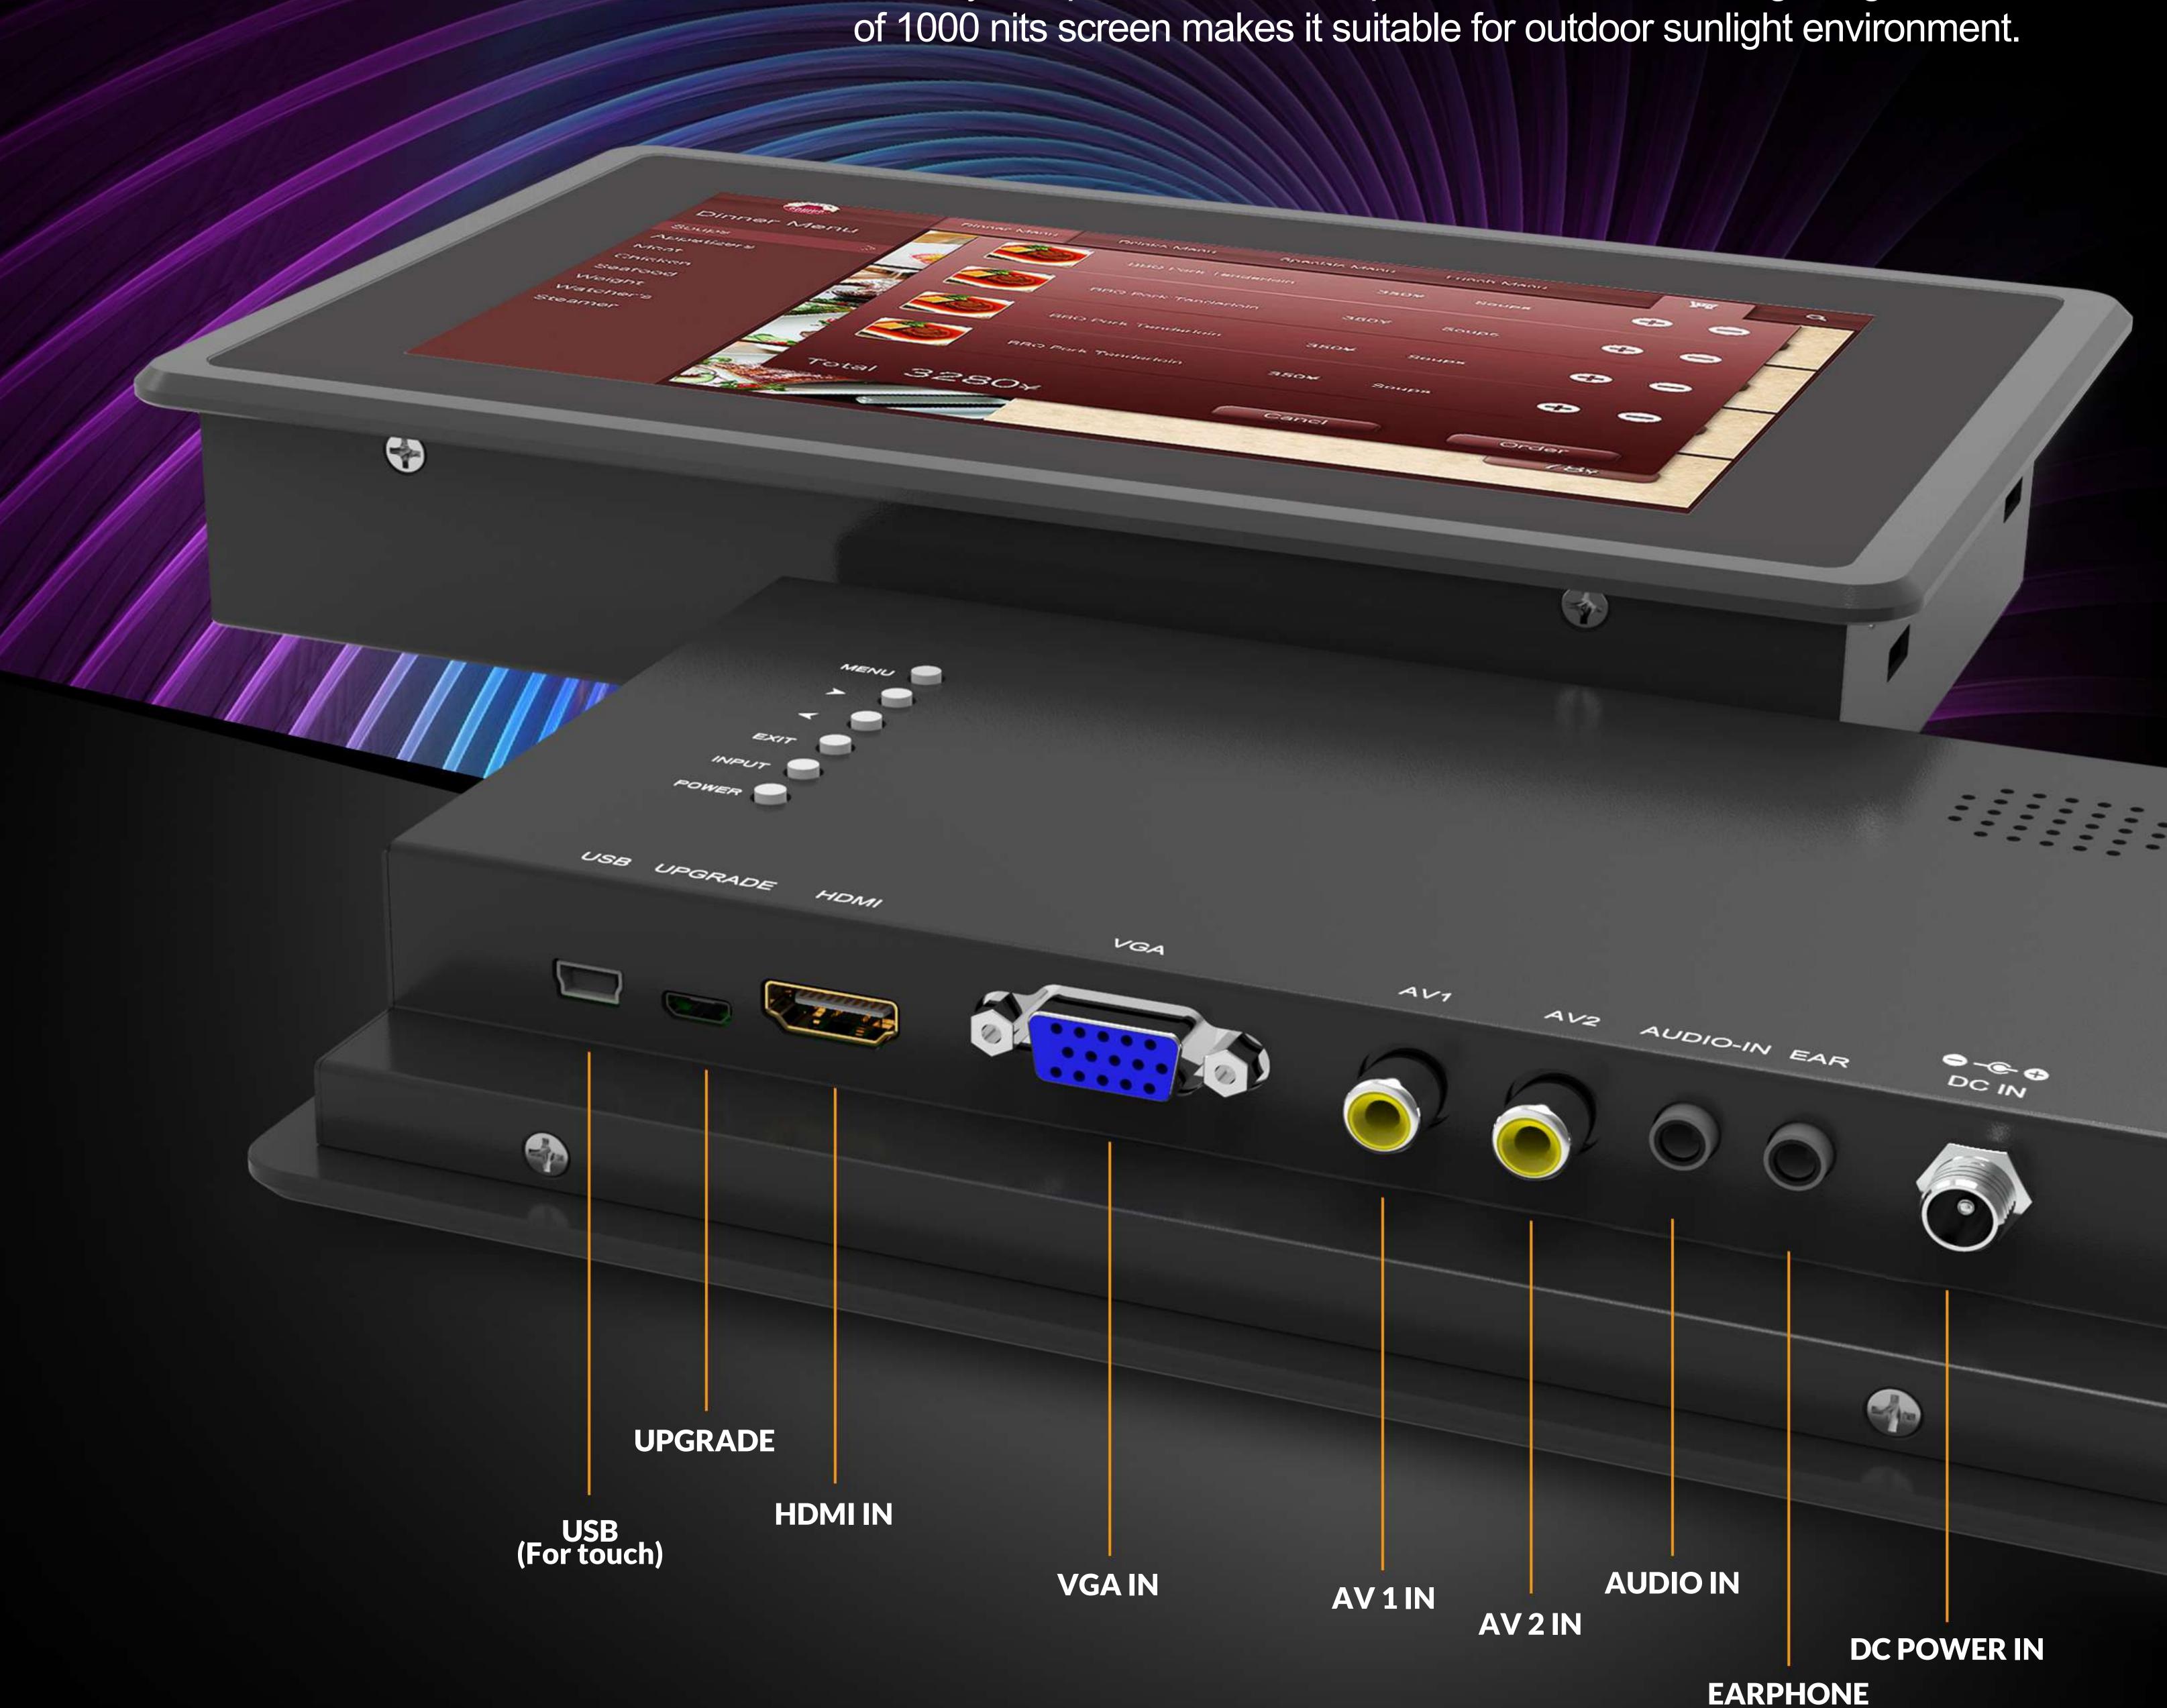


Rich Interfaces

In addition to the interfaces shown, the engineers have creatively reserved a number of expansion ports on the mainboard that can be uniquely customized for different requests. The readily replaceable sheet metal also provides a great deal of ease in modifying the interfaces.



IP64 Rating Screen Panel

The front panel is designed to carry IP64 degree of protection which offer complete protection against particles, and a good level of protection against water, up to water projected by a nozzle against front panel from any direction.

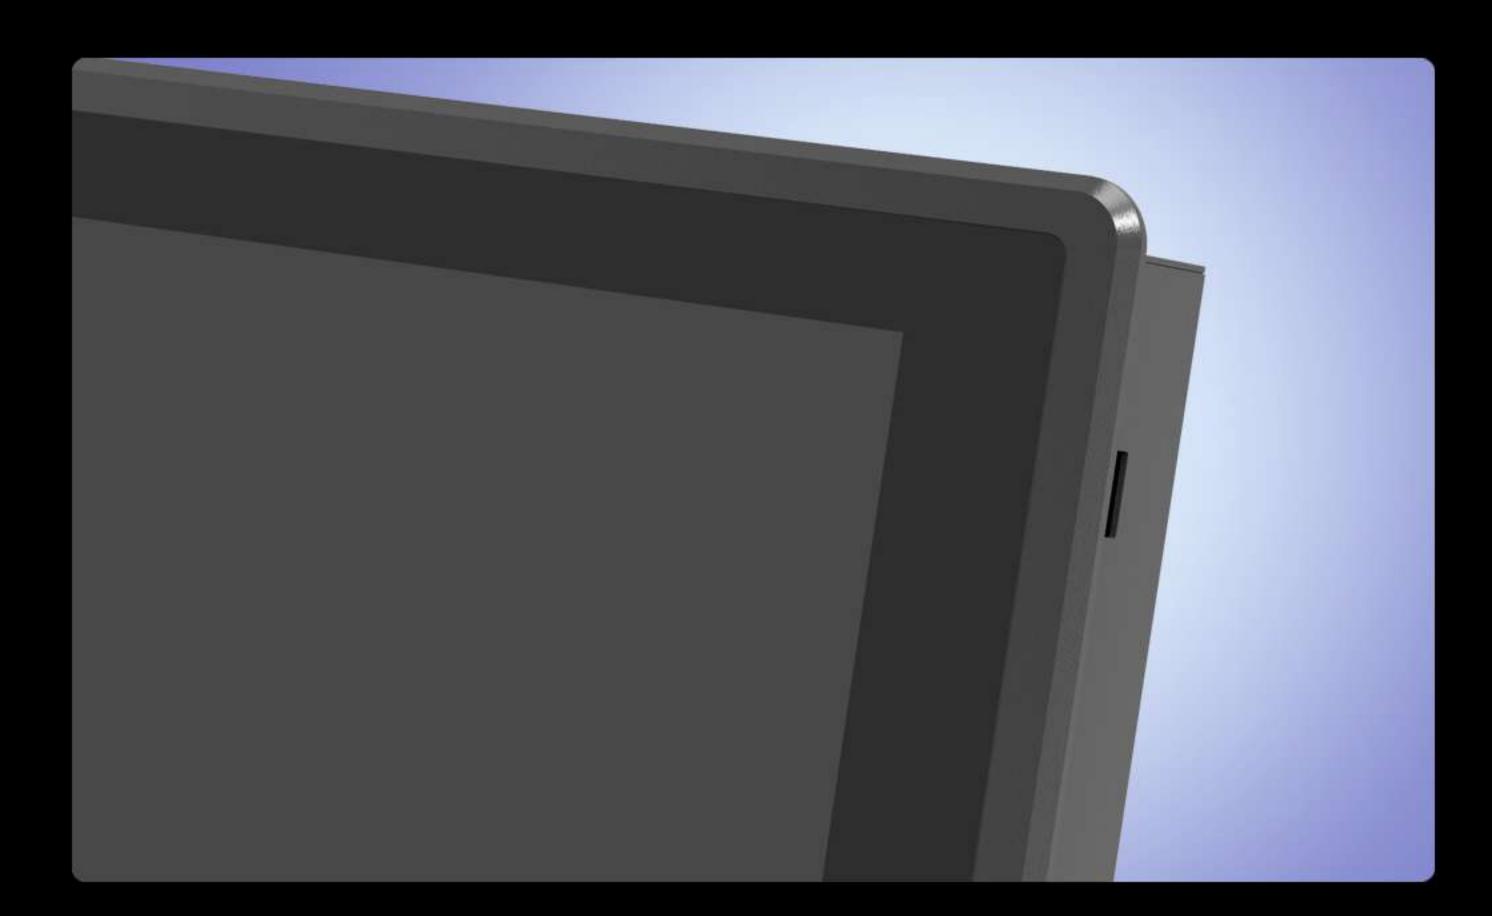

Metal Housing


The aluminium case, with its fine workmanship and close fit with the screen, achieves IP64 rating.



Input Voltage 12-24V

Wide range of input voltages, which is a choice for different application environments

INDUSTRIALHMI

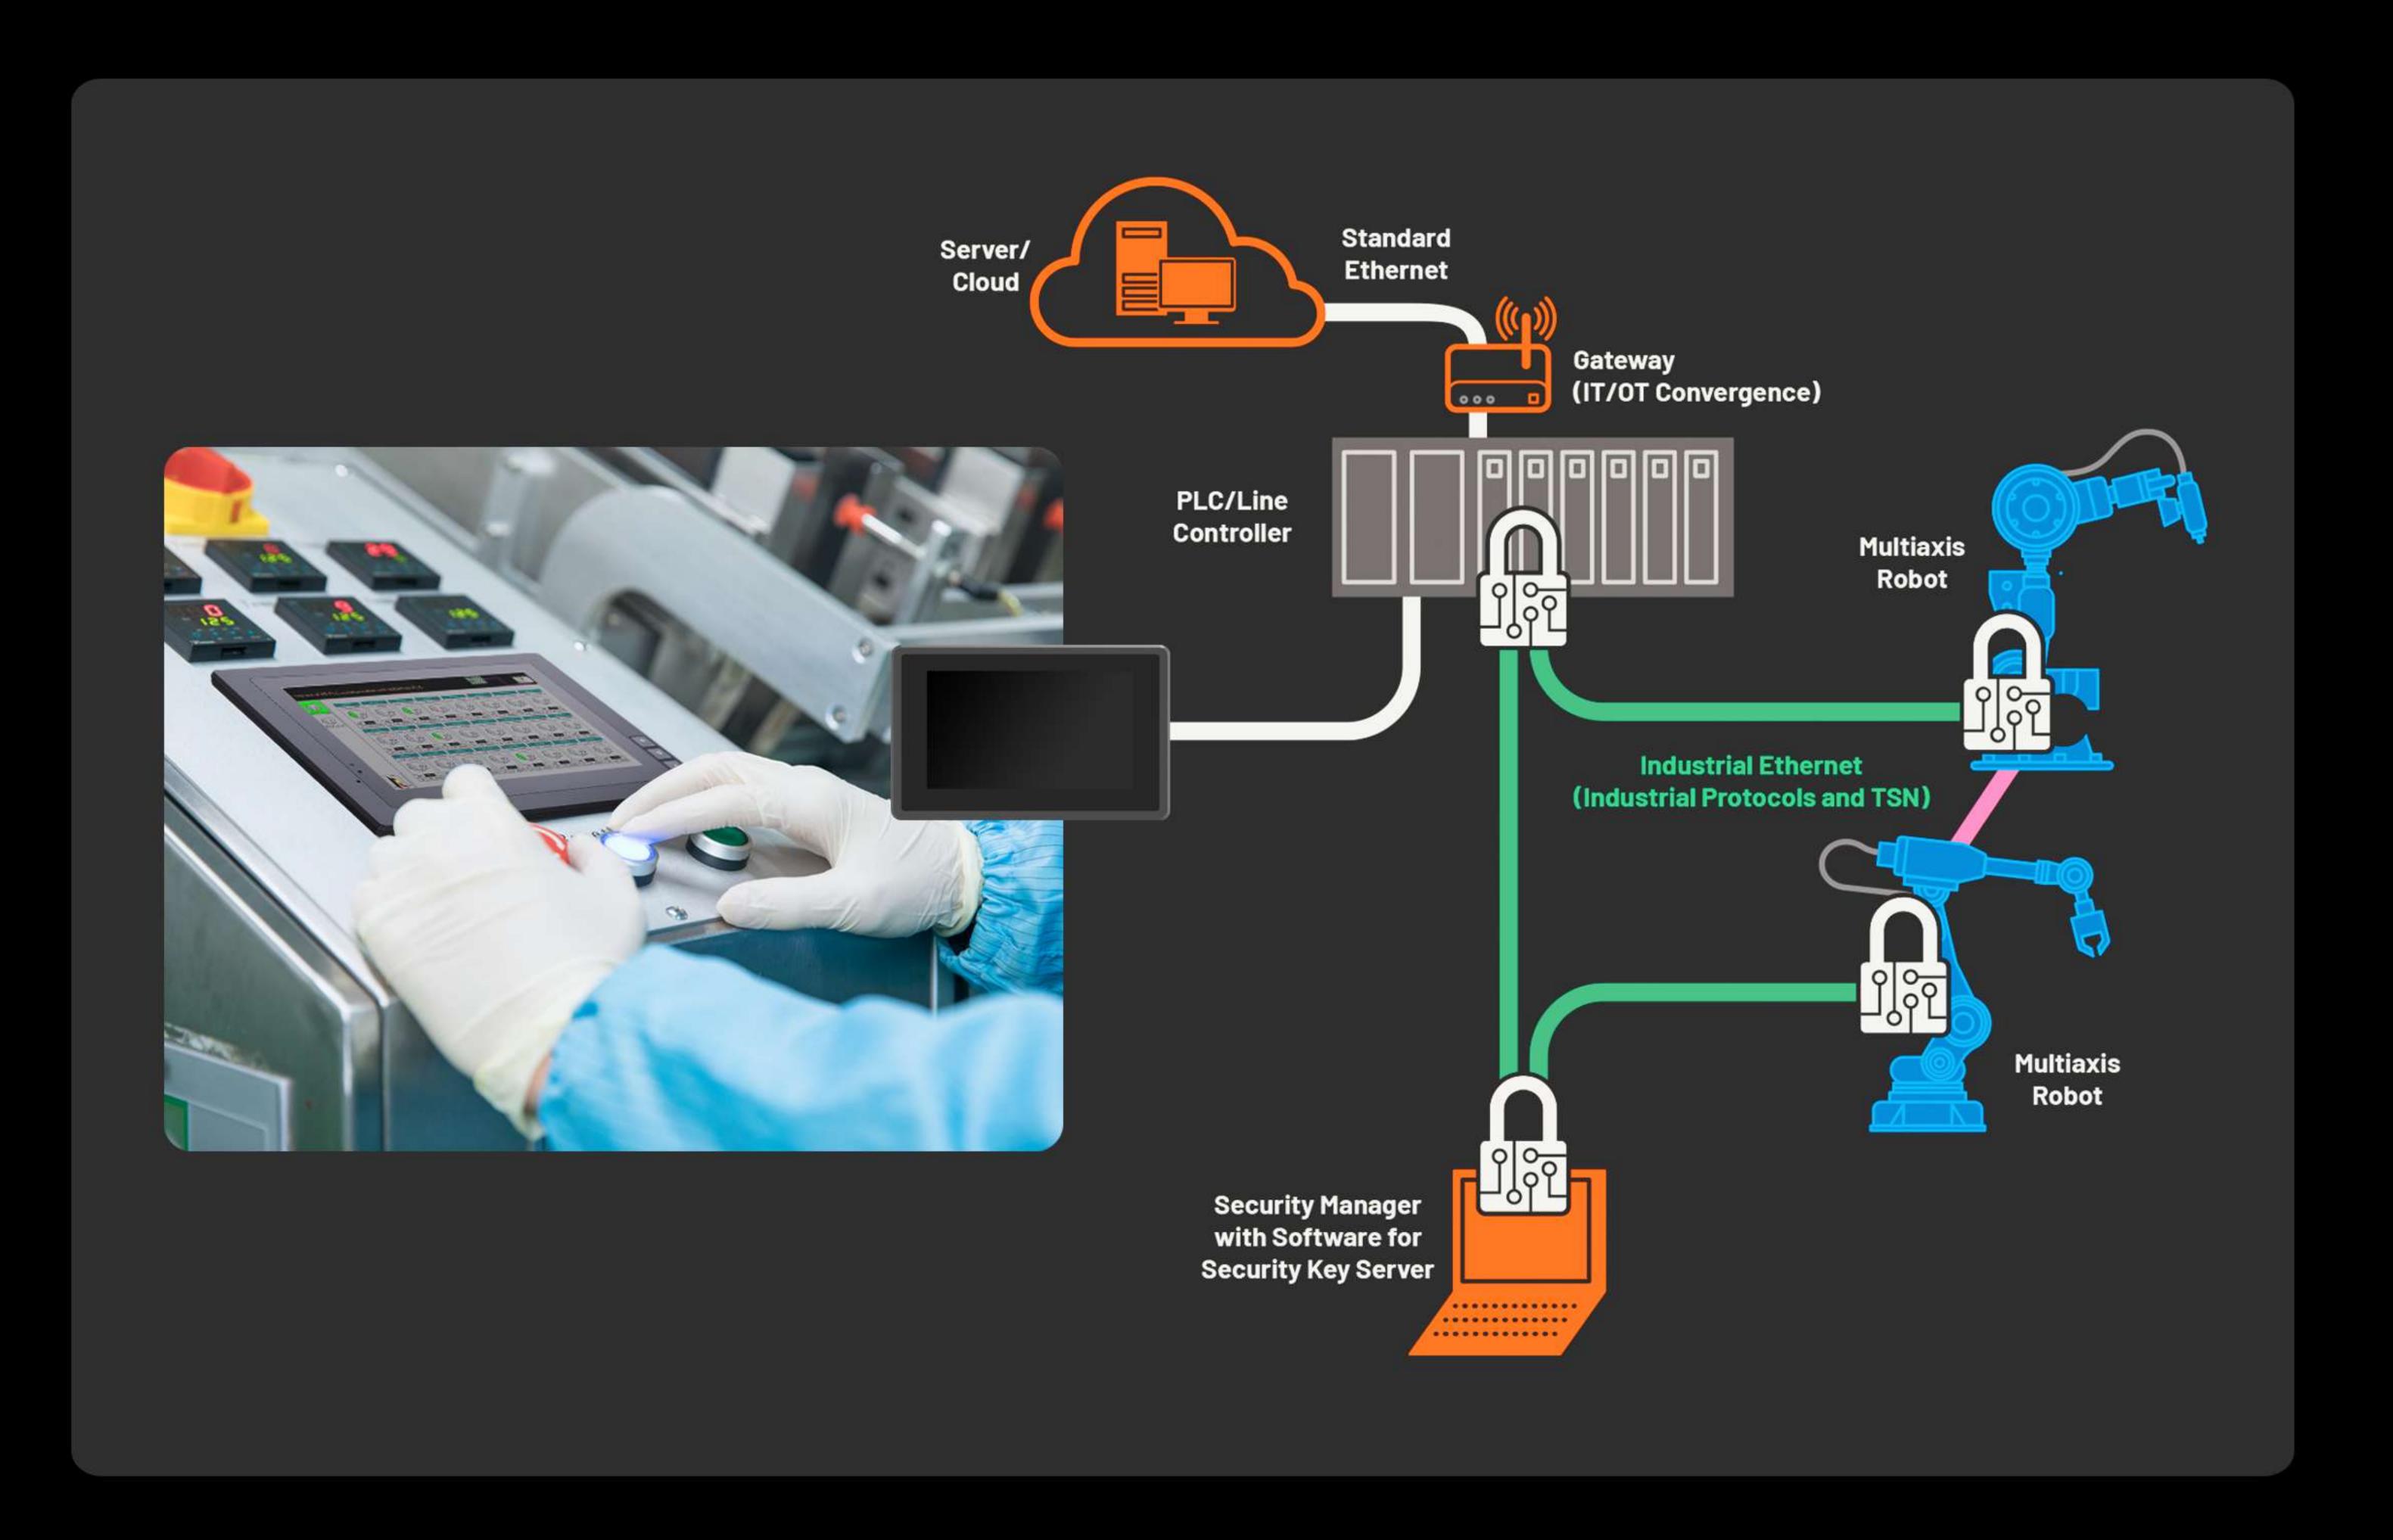

Industrial HMI Applications


Due to increasingly developed world of industrial automation, HMIs are used in wide range of applications.

As the controlling and monitoring core of automated processes, stability, efficiency and environmental adaptability are particularly important. Therefore, it is adapted to different scenarios.





Specifications


DISPLAY	Touch Screen	Optional, 10-point capacitive touch
	Panel	7" LCD
	Physical Resolution	800×480
	Aspect Ratio	16:10
	Brightness	1000 nits
	Contrast	1000:1
	Viewing Angle	140° / 120° (H/V)
INPUT	HDMI	1 × HDMI 1.4b
	VGA	×1
	AV	×2
	Audio	×1
SUPPORTED FORMATS	HDMI	2160p 24/25/30, 1080p 24/25/30/50/60,
		1080i 50/60, 720p 50/60
AUDIO	Speaker	×1
	HDMI	2ch
	Ear Jack	3.5mm - 2ch 48kHz 24-bit
POWER	Input Voltage	DC 12-24V
	Power Consumption	≤8.5W (12V)
ENVIRONMENT	Operating Temperature	-20°C~60°C (-4°F~140°F)
	Storage Temperature	-30°C~70°C (-22°F~158°F)
	Water-proof	IP x4 front panel
	Dust-proof	IP 6x front panel
DIMENSION	Dimension(LWD)	210mm × 131mm × 34.2mm
	Wall Mount Slot	×4
	Weight	710g

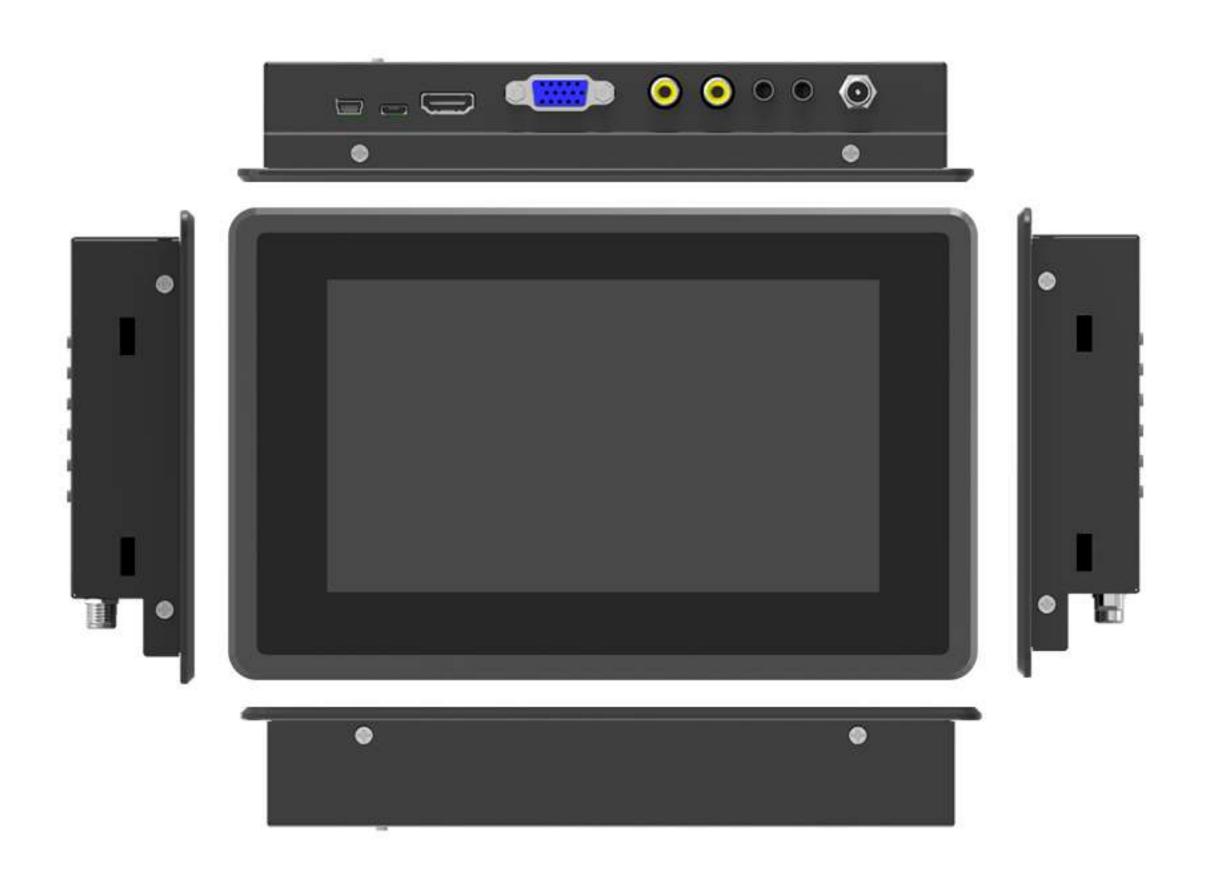



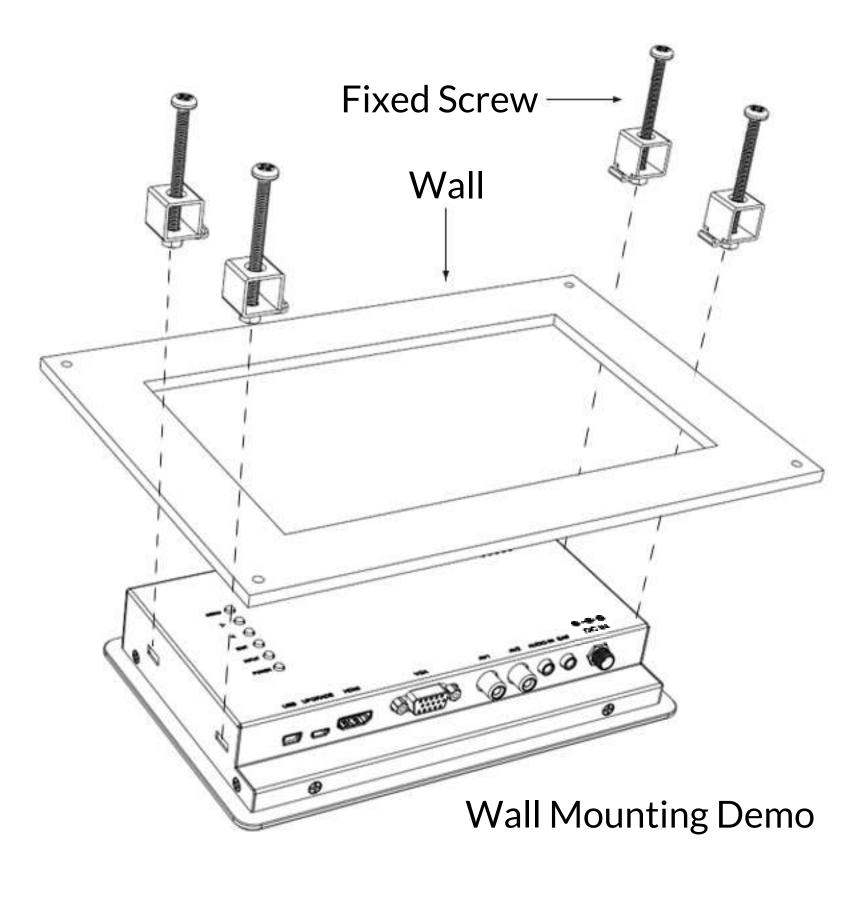

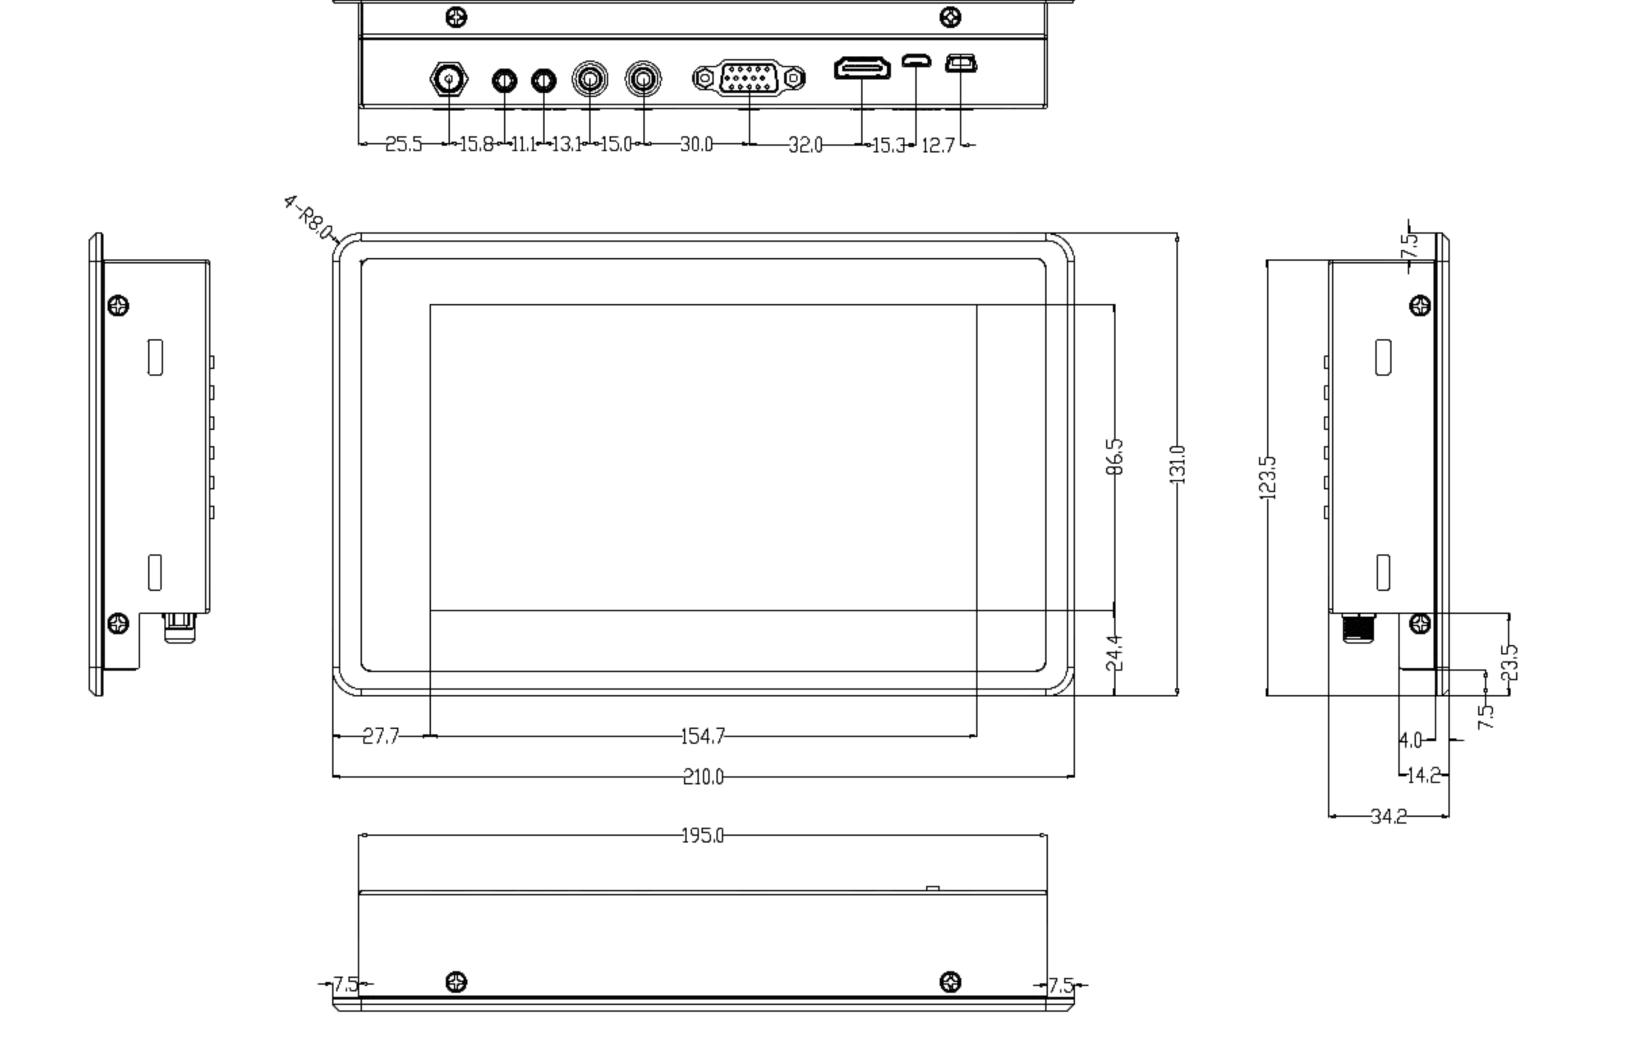

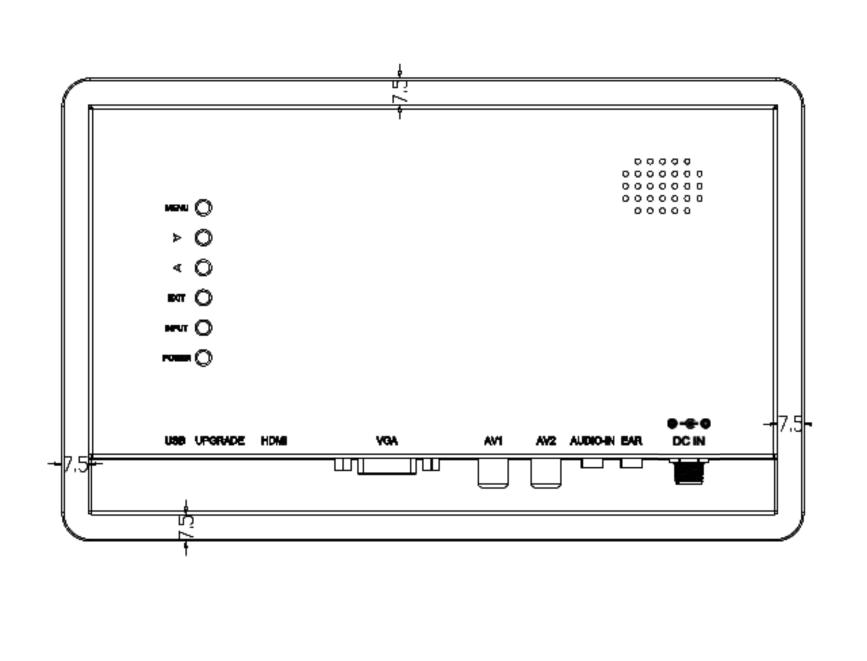

ACCESSORIES












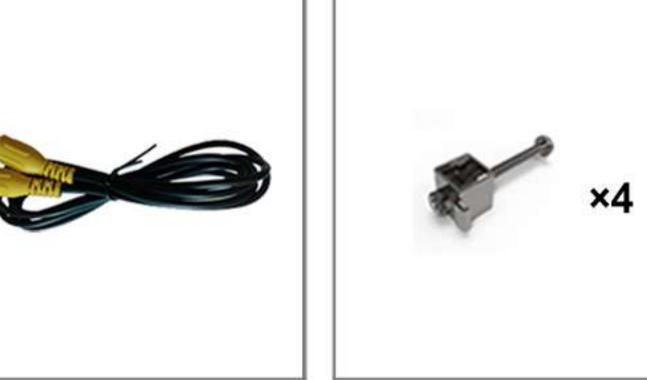

12V 2A DC Power Adapter

HDMI A to A Cable

VGA Cable

USB A to Mini USB Cable (for touch)

Audio Input Cable

AV Input Cable

Fixed Screws

Customized Service

(The following elements are specific to customised items and do not represent parameters of this monitor)

Interface Types


















Screen Panel



Size





Viewing Angle



Anti-glare



Anti-explosion





Anti-fingerprint

Basic Appearance

Touch Types

. . .

• • •

Appearance Structure

Iron, Stainless Steel, Aluminum, ABS Plastic...

Processing

CNC, Die-cast, Sheet metal...




Color





Shape

Application Environment



Vibration



Shock



EMC/EMI









Dust-proof



Water-proof





